

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 0 950 803 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
03.09.2003 Bulletin 2003/36

(51) Int Cl.7: **F02D 41/02, F01N 3/08,  
B01D 53/94**

(21) Application number: **99107288.5**

(22) Date of filing: **14.04.1999**

(54) **Exhaust purification device for internal combustion engine**

Abgasreinigungsanlage für eine Brennkraftmaschine

Dispositif de purification de gaz d'échappement d'un moteur à combustion interne

(84) Designated Contracting States:  
**DE FR GB**

(30) Priority: **15.04.1998 JP 10476298**  
**24.11.1998 JP 33247098**  
**24.03.1999 JP 7949299**

(43) Date of publication of application:  
**20.10.1999 Bulletin 1999/42**

(73) Proprietor: **Nissan Motor Co., Ltd.**  
**Yokohama city, Kanagawa (JP)**

(72) Inventors:  
• **Takahashi, Hideaki**  
**Yokohama city, Kanagawa (JP)**

• **Nishizawa, Kimiyoshi**  
**Yokohama city, Kanagawa (JP)**  
• **Nakamura, Takeshi**  
**Yokohama city, Kanagawa (JP)**

(74) Representative: **Grünecker, Kinkeldey,**  
**Stockmair & Schwanhäusser Anwaltssozietät**  
**Maximilianstrasse 58**  
**80538 München (DE)**

(56) References cited:  
**EP-A- 0 899 431**

**EP 0 950 803 B1**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

[0001] The present invention relates to an exhaust purification device for an internal combustion engine.

[0002] Some catalysts for purifying the exhaust gas of an internal combustion engine absorb NOx in exhaust gas when the air-fuel ratio is leaner than the stoichiometric air-fuel ratio. When the oxygen concentration of the exhaust gas falls, i.e. when the air-fuel ratio changes over to stoichiometric or rich, the NOx absorbed on the catalyst is desorbed, and the desorbed NOx is reduced by HC and CO which are present in the exhaust gas (JPA 6-336916 published in 1994).

[0003] However, engine fuel or lubricating oil generally contains sulfur, and SOx (sulfur oxides) in the exhaust gas tends to be absorbed by or deposit on the catalyst more easily when the vehicle is being driven for long periods of time at a lean air-fuel ratio. If a large amount of SOx is deposited on the catalyst, absorption of NOx declines and exhaust gas purification performance is considerably impaired.

[0004] The SOx deposited on the catalyst is discharged from the catalyst when the catalyst temperature rises above its usual level. Hence, when the amount of SOx deposited on the catalyst increases, the catalyst temperature is increased to remove SOx.

[0005] In JPA 10-54274 (published in 1998), when the amount of SOx deposited on the catalyst increases and absorption of NOx by the catalyst declines, lean misfire of the engine is performed for a predetermined time. Due to this, the amount of unburnt components increases in the exhaust gas, the temperature of the catalyst increases when these unburnt components are burnt in the catalyst, and SOx is discharged.

[0006] Alternatively, the ignition timing of the engine is retarded to increase the temperature of the exhaust gas and discharge SOx from the catalyst.

[0007] However, although the temperature increase effect is large when a lean misfire is performed and unburnt components are burnt in the catalyst, it is difficult to correctly control the amount of unburnt components sent to the catalyst, and there is a possibility of the temperature rising too much and impairing the durability of the catalyst.

[0008] On the other hand, since the temperature increase due to the retardation angle of the ignition timing raises the catalyst temperature indirectly by raising the exhaust gas temperature, a sufficient temperature increase for discharging SOx is not necessarily achieved even if durability is maintained.

[0009] A method is known of improving exhaust gas composition immediately after engine startup by installing a three-way catalyst on the upstream side, i.e. in the exhaust manifold, where the temperature after startup increases quickly. However, if an NOx absorption catalyst is also installed downstream of the upstream three-way catalyst and it is attempted to raise the temperature in order to discharge SOx from the downstream catalyst, the temperature of the upstream catalyst increases too much, and these severe temperature conditions lead to early deterioration of the upstream catalyst.

[0010] EP 0 899 431 A2 is not a prepublished document but represents prior art pursuant to Article 54(3) EPC. Said document discloses an exhaust purification device for an internal combustion engine which has only one air-fuel ratio sensor.

[0011] Moreover, the exhaust purification device known from said document does not disclose to feedback control the air-fuel ratio during the process of discharging SOx.

[0012] It is therefore an object of the present invention to provide an exhaust purification device for an internal combustion engine which increases the temperature of a downstream catalyst effectively while avoiding the temperature increase of an upstream catalyst.

[0013] It is a further object of the invention to provide an exhaust purification device for an internal combustion engine which can efficiently remove SOx from a downstream NOx absorption catalyst.

[0014] The above objects are achieved according to the invention by each of the subject matters of claims 1 and 24.

[0015] Preferred embodiments of the invention are indicated in the subclaims.

[0016] The details as well as other features and advantages of the invention are set forth in the remainder of the specification and are shown in the accompanying drawings, in which

Fig. 1 is a schematic diagram showing a first embodiment of this invention.

Fig. 2 is a flowchart for determining SOx discharge conditions according to the first embodiment.

Fig. 3 is a flowchart for determining rear catalyst temperature increase conditions.

Fig. 4 is a flowchart for determining air-fuel ratio enrichment conditions.

Fig. 5 is a flowchart for setting an air-fuel ratio mode.

Fig. 6 is a flowchart for setting an air-fuel ratio control value.

Fig. 7 is a flowchart for setting basic control constants of air-fuel ratio control.

Fig. 8 is a flowchart for computing a correction value of air-fuel ratio control.

Fig. 9 is a flowchart for computing a correction coefficient of a first cylinder group in air-fuel ratio control.

Fig. 10 is a flowchart for computing a correction coefficient of a second cylinder group in air-fuel ratio control.

Fig. 11 is a flowchart for setting a target air-fuel ratio. Fig. 12 is a flowchart for computing a fuel injection amount and fuel injection timing of the first cylinder group.

Fig. 13 is a flowchart for computing a fuel injection amount and fuel injection timing of the second cylinder group.

Fig. 14 is a flowchart for setting a retardation angle of an ignition timing.

Fig. 15 is a flowchart for setting an opening timing of an exhaust valve.

Fig. 16 is a flowchart for setting a valve aperture of an EGR valve.

Fig. 17 is a descriptive drawing showing a running control region.

Fig. 18 is a time chart for describing a computing process of air-fuel ratio control.

Fig. 19 is a time chart showing a relation between a rear catalyst temperature and air-fuel ratio control.

Fig. 20 is a flowchart for setting an air-fuel ratio control value according to a second embodiment.

Fig. 21 is a flowchart for setting a basic control constant

Fig. 22 is a descriptive drawing showing an air-fuel ratio fluctuation of the first and second cylinder groups.

Fig. 23 is a flowchart for setting an air-fuel ratio control value according to a third embodiment.

Fig. 24 is a flowchart for setting a basic control constant.

Fig. 25 is a flowchart for setting an air-fuel ratio mode according to a fourth embodiment

Fig. 26 is a flowchart for determining SOx discharge conditions according to a fifth embodiment.

Fig. 27 is a flowchart for setting a basic control constant.

Fig. 28 is a descriptive drawing showing NOx absorption characteristics of the rear catalyst.

Fig. 29 is a flowchart for determining SOx discharge conditions according to a sixth embodiment.

[0017] Hereafter, the preferred embodiments of this invention will be described referring to the drawings.

[0018] First, describing a first embodiment, in Fig. 1, 1 is a spark-ignition type gasoline engine, 2 is an intake passage, and 3 is an intake throttle valve.

[0019] Fuel injection valves 4 are formed to supply fuel directly to each cylinder of the engine 1.

[0020] In this case, lean stratified combustion may be performed by setting the fuel injection timing of the fuel injection valves 4 to coincide with the compression stroke, or stoichiometric or rich premixing combustion can be performed by setting the fuel injection timing of the fuel injection valves 4 to coincide with the intake stroke. However, the fuel injection valves 4 may inject fuel into the intake passage 2 downstream of the throttle valve 3.

[0021] Although not shown, of the intake valve and the exhaust valve, the opening timing of at least the exhaust valve may be varied by a variable valve mechanism.

[0022] An exhaust gas passage 5 comprises first and second exhaust manifolds 5a, 5b corresponding to a first cylinder group and second cylinder group of the engine 1, and an exhaust gas tube 5c which combines the exhaust gases from these first and second manifolds 5a, 5b.

[0023] A three-way catalyst 21 which functions as a first front catalyst and a three-way catalyst 22 which functions as a second front catalyst are respectively installed in the first and second exhaust manifolds 5a, 5b. An NOx absorption/reduction type three-way catalyst 23 is installed in the downstream exhaust gas tube 5c as a rear catalyst.

[0024] The upstream three-way catalysts 21, 22 are installed in the exhaust manifolds of the engine so that the temperature increases immediately after startup, and the downstream three-way catalyst 23 is installed for example under the floor of the vehicle away from the engine 1 to maintain its heat resisting properties.

[0025] The exhaust discharged from the first and second cylinder groups is led to the three-way catalysts 21 and 22 respectively. Therein, NOx is reduced and HC, CO are oxidized with maximum efficiency at the stoichiometric air-fuel ratio.

[0026] Although the NOx absorption/reduction three-way catalyst 23 performs reduction of NOx and oxidation of HC, CO with the greatest conversion efficiency at the stoichiometric air-fuel ratio, NOx in the exhaust gas is absorbed when the air-fuel ratio is lean. This NOx is desorbed when the oxygen concentration of the exhaust gas falls, e.g. at the stoichiometric air-fuel ratio or a rich air-fuel ratio, and the desorbed NOx is reduced by HC and CO in the exhaust gas.

[0027] To control the fuel injection amount and fuel injection timing of the above-mentioned fuel injection valves 4 according to running conditions, a control unit 11 is provided.

[0028] A rotation angle signal from a crank angle sensor 12, intake air amount signal from an air flow meter 13, air-fuel ratio (oxygen concentration) signals from O<sub>2</sub> sensors 31, 32 installed respectively upstream of the above-mentioned three-way catalysts 21, 22 and an O<sub>2</sub> sensor 33 arranged downstream of the downstream three-way catalyst 23, a signal from NOx sensor 36 installed downstream of the downstream three-way catalyst 23, and a signal indicating the temperature of the downstream three-way catalyst 23 from a catalyst temperature sensor 35, are input to this control unit 11.

[0029] 41 is an EGR (exhaust gas recirculation) passage which connects the intake passage 2 and exhaust gas passage 5 to recirculate a part of exhaust gas to the intake passage 2. An EGR control valve installed in the EGR passage 41 is controlled by the control unit 11 to control a flow amount of a EGR gas based on the running condition.

[0030] Also, although not shown, signals from a water temperature sensor which detects an engine cooling water

temperature, a gear position sensor which detects the gear position of a transmission, an accelerator position sensor which detects an accelerator depression amount, and a vehicle speed sensor which detects vehicle speed, are also input. Based on these signals, the fuel injection amount and fuel injection timing of the fuel injection valves 4 are controlled, and the ignition timing of a spark plug, not shown, and the valve opening timing of the exhaust valve, are

variably controlled.

[0031] Further, in the control unit 11, when sulfur oxides (SOx) in the exhaust gas have deposited on the NOx absorption/reduction three-way catalyst 23 and NOx absorption declines, control is performed for eliminating the deposited SOx. For this purpose, the air-fuel ratios of the cylinder groups are set so that the air-fuel ratio of the exhaust gas flowing into the three-way catalyst 21 in one of the exhaust passages is richer than the stoichiometric air-fuel ratio, the

air-fuel ratio of the exhaust gas flowing into the other three-way catalyst 22 is lean, and the air-fuel ratio of the exhaust gas after the two exhaust gas streams are combined is the stoichiometric air-fuel ratio or an air-fuel ratio richer than stoichiometric.

[0032] As a result, a lean gaseous mixture flows into the three-way catalyst 21, a rich gaseous mixture flows into the three-way catalyst 22, and excess unburnt components and oxygen which do not contribute to the catalytic reaction and oxygen flow downstream and into the NOx absorption/reduction three-way catalyst 23. The reaction in the three-way catalyst 23 is promoted by the unburnt components and oxygen, and the catalyst temperature rises. This discharges SOx which has been absorbed and accumulated on the three-way catalyst 23, and reduces and purifies the SOx, so that the function of the catalyst 23 is restored. On the other hand, as the upstream three-way catalysts 21, 22 have either a lean or rich air-fuel ratio, their catalytic reactions are suppressed, preventing their temperatures from rising excessively which would damage their durability,

[0033] The details of the control performed by the control unit 11 will now be described in detail by the following flowcharts.

[0034] Fig. 2 is a determining routine (1) for determining the discharge conditions for SOx deposited on the NOx absorption/reduction catalyst which is the rear catalyst, and it is performed at an interval of 10ms.

[0035] Here, the amount of SOx which the rear catalyst has absorbed and accumulated is estimated, and it is determined whether the amount of SOx deposited on the catalyst has reached a predetermined value, i.e. whether or not the conditions for discharging SOx hold.

[0036] Specifically, when the conditions for discharging SOx hold a flag *Fsox* is set to 1, and when they do not hold, the flag *Fsox* is set to 0.

[0037] First, in a step S501 (steps will hereafter be referred to as S...), the output of the catalyst temperature sensor is A/D converted to find a rear catalyst temperature *Tcat*. Also, an engine rotation speed *N* is calculated based on the occurrence interval of a predetermined signal of the crank angle sensor, and an engine load *T* (for example, a target generation torque of the engine depending on an accelerator depression amount) is calculated based on the output of the accelerator position sensor.

[0038] The rear catalyst temperature *Tcat* may be estimated based on engine rotation speed and engine load.

[0039] In S502, it is determined whether or not the temperature *Tcat* of the rear catalyst is equal to or less than an SOx discharge temperature *Tcat2*. When it is equal to or less than *Tcat2*, SOx is absorbed and accumulated by the catalyst, and when it is higher than *Tcat2*, SOx is discharged.

[0040] In S503,  $\Delta SOXa$  which is the amount of SOx absorbed on the rear catalyst in a predetermined time (here 10ms) is computed.

[0041] Specifically,  $\Delta SOXa = (\text{amount of SOx flowing into rear catalyst in predetermined time}) \times (\text{SOx absorption coefficient of rear catalyst})$ .

[0042] Here, the amount of SOx flowing into the catalyst in predetermined unit time is computed as a parameter of, for example, the engine rotation speed *N*, engine load *T* and average air-fuel ratio, and the SOx absorption coefficient of the rear catalyst which is the amount of SOx absorbed in unit time, is computed as a parameter of, for example, catalyst temperature *Tcat* and average air-fuel ratio. The SOx absorption rate = (SOx absorption amount in unit time) (SOx introducing amount in unit time). As average air-fuel ratio, a target equivalent ratio *TFBYA* set by the target air-fuel ratio setting routine described hereafter, can be used.

[0043] The SOx absorption rate of the rear catalyst is a value from 0 to 1, and it has the following characteristics relative to various parameters.

[0044] The SOx absorption rate becomes larger the less the absorption amount of the rear catalyst, and is a maximum when the absorption amount is 0. The SOx absorption rate is a maximum when the catalyst temperature is a predetermined temperature. When the temperature is lower than the predetermined temperature, it decreases the lower the temperature, and is 0 below the catalyst activation temperature. When the temperature is higher than the predetermined temperature, it decreases the higher the temperature, and is 0 at or above the SOx discharge temperature. The SOx absorption coefficient decreases the smaller the leanness of the air-fuel ratio, and is 0 at an air-fuel ratio richer than stoichiometric.

[0045] Next, in S504, the SOx absorption amount  $\Delta SOXa$  per a predetermined time is added to *SOXz*, the estimated

amount of SOx computed on the immediately preceding occasion, to compute the most recent SOX. In S505, it is determined whether or not the estimated SOx amount SOX is larger than a maximum permitted value SOXmax. This permitted value SOXmax is set at such a level that a predetermined NOx absorption capacity, i.e., an absorption capacity NOXth, remains in the rear catalyst. When the estimated absorption amount is larger than the permitted value, the flag Fsox is set to 1 in S506.

[0046] When the conditions are such that the temperature is high so that SOx is discharged in S502, the routine proceeds to S507, and ΔSOXr which is the amount of SOx discharged in a predetermined time (here 10ms) from the rear catalyst is computed as follows.

$$\Delta SOXr = (\text{predetermined time}) \times (\text{SOx discharge rate from rear catalyst})$$

[0047] The SOx discharge rate of the rear catalyst is an SOx amount discharged in a predetermined unit time, and is computed as a parameter of, for example, the present SOx absorption amount (estimated value of SOx absorption amount computed on the immediately preceding occasion) SOXz, catalyst temperature Tcat and average air-fuel ratio. The target equivalent ratio TFBYA set by the target air-fuel ratio setting routine can be used as the average air-fuel ratio.

[0048] However, during SOx removal control, the average air-fuel ratio may be shifted to richer than the stoichiometric air-fuel ratio by shifting the center point of air-fuel ratio feedback control while TFBYA=1, and this shift amount is also taken into consideration.

[0049] The SOx discharge rate from the rear catalyst has the following characteristics relative to various parameters.

[0050] The SOx discharge rate is smaller the less the SOx absorption amount.

[0051] The SOx discharge rate is smaller the lower the catalyst temperature, and is 0 at or lower than the SOx discharge temperature. The SOx discharge rate is also smaller the less the richness of the air-fuel ratio, and is 0 at a lean air-fuel ratio.

[0052] In S508, the most recent SOx is computed by subtracting ΔSOXr from the estimated SOx amount SOXz computed on the immediately preceding occasion. In S509, it is determined whether or not the estimated SOx amount SOX is less than a predetermined value SOXmin. The predetermined value SOXmin is set to a small value near 0.

[0053] When the comparison result is smaller than the predetermined value, the routine proceeds to S510, the flag Fsox is set to 0, and discharge of SOx is thereby completed.

[0054] In the above, if the estimated SOx amount should exceed the permitted amount, Fsox=1 is maintained until SOx is almost completely discharged, and SOx removal control is not performed frequently.

[0055] The estimated SOx amount SOX may be computed more simply. For example, S503 and S507 may be omitted and ΔSOXa, ΔSOXr in S504 and S508 may be set to fixed values. As absorption/discharge of SOx proceeds relatively slowly, it is sufficient if this routine is executed at an interval of 1sec or 10sec. In this case, ΔSOXa, ΔSOXr may be computed as absorption/discharge amount of SOx at an interval of 1sec or 10sec.

[0056] Also, the SOx absorbed by the rear catalyst remains in the catalyst even after the engine stops, so the estimated SOX is stored even after the engine stops, and the stored SOX is used as an initial value for subsequent computation of SOX on the next occasion when the engine starts.

[0057] Next, Fig. 3 is a temperature rise control condition determining routine (1) of the rear catalyst, and it is performed at an interval of 10ms.

[0058] Herein, a flag Fheat is set by determining whether or not the conditions hold for raising the temperature of the rear catalyst based on the flag Fsox and the catalyst temperature. When the conditions hold, Fheat = 1 and when they do not hold Fheat = 0.

[0059] First, in S601, A/D conversion is performed on the output of the rear catalyst temperature sensor to find the catalyst temperature Tcat, the engine rotation speed N is calculated based on the occurrence interval of a predetermined signal of the crank angle sensor, and an engine load T is calculated based on the output of the accelerator position sensor.

[0060] In S602, it is determined whether or not conditions hold for discharging SOx absorbed by the rear catalyst by determining whether or not the flag Fsox=1. When discharging conditions hold, it is determined whether or not the catalyst temperature Tcat is higher than the predetermined value Tcat1 in S603. The predetermined value Tcat1 is set to a lower temperature value less than the SOx discharge temperature Tcat2.

[0061] If it is attempted to increase the temperature of the rear catalyst when it is equal to or less than the predetermined value Tcat1, to a temperature equal to or higher than the SOx discharge temperature Tcat2, special control to increase the catalyst temperature has to be performed for a long period of time, but this has an adverse effect on emissions or fuel consumption. Therefore, temperature increase control is not performed when the temperature is equal to or less than Tcat1.

[0062] However, when the engine rotation speed N and engine load T are both large, for example when it may be considered that they are within a predetermined region (e.g. region B) in Fig. 16, and that the catalyst temperature

would increase rapidly if temperature increase control were performed, temperature increase control may be permitted even when the temperature is equal to or less than  $T_{cat1}$ .

[0063] In S604, it is determined whether or not the engine rotation speed  $N$  and engine load  $T$  are within a region A of Fig. 16. The region A is a running region wherein the catalyst temperature  $T_{cat}$  can be raised to or above the SOx discharge temperature  $T_{cat2}$  when temperature increase control is performed.

[0064] Depending on the engine, there may be some cases where the catalyst temperature  $T_{cat}$  can be increased to or above the SOx discharge temperature  $T_{cat2}$  if temperature increase control is performed even in a region usually set as a lean operating region ( $TFBYA < 1$ ). In such a case, only an overlapping part of the region in which temperature increase is possible with the stoichiometric air fuel ratio running region ( $TFBYA = 1$ ) may be set as the region A or all the regions in which temperature increase is possible may be set as the region A, and temperature increase control given priority over lean running while the conditions for discharging absorbed SOx from the rear catalyst hold ( $F_{sox} = 1$ ).

[0065] In S605, it is determined whether or not the catalyst temperature  $T_{cat}$  is equal to or less than a permitted temperature  $T_{cat3}$ . This predetermined value  $T_{cat3}$  is set to a high temperature value larger than  $T_{cat2}$ .

[0066] The rear catalyst discharges SOx more easily the higher the temperature, but if the temperature is increased excessively the durability of the catalyst is impaired, so temperature increase control is not performed when the temperature is higher than the permitted temperature  $T_{cat3}$ .

[0067] Therefore, when the temperature is equal to or less than  $T_{cat3}$ , the flag  $F_{heat}$  for determining temperature increase is set to 1 in S606, but when the temperature is higher the routine proceeds to S607 and the flag  $F_{heat}$  is set to 0.

[0068] Fig. 4 is a routine for determining the conditions for enriching the total air-fuel ratio, and it is performed at an interval of 10ms.

[0069] Here, a flag  $F_{rich}$  is set by determining whether the conditions for enriching the air-fuel ratio hold or do not hold, based on the determining flag  $F_{sox}$  of SOx discharge conditions and catalyst temperature. When air-fuel ratio enriching conditions hold,  $F_{heat} = 1$  and when they do not hold,  $F_{heat} = 0$ .

[0070] In S621, the output of the catalyst temperature sensor is A/D converted to compute the catalyst temperature  $T_{cat}$ . In S622, it is determined whether or not the conditions hold for discharging SOx which has been absorbed and deposited by the rear catalyst.

[0071] When the discharge conditions hold, in S623, is determined whether or not the catalyst temperature  $T_{cat}$  is larger (higher) than the SOx discharge temperature  $T_{cat2}$ . When it is larger than  $T_{cat2}$ , the air-fuel ratio is enriched to promote the discharge of SOx and reduce/purify the discharged SOx. For this purpose, when the catalyst temperature is higher than the discharge temperature, the flag  $F_{rich}$  is set to 1 in S624.

[0072] On the other hand, when the temperature is lower than  $T_{cat2}$ , the routine proceeds to S625 and the flag  $F_{rich}$  is set to 0.

[0073] Fig. 5 shows a mode setting routine which performs lean and rich shift of the exhaust gas air-fuel ratio in the first and second cylinder groups, and it is performed at an interval of 10ms.

[0074] Here, the mode setting is changed over based on the variation of the determining flag  $F_{sox}$  of SOx discharge conditions. In this case, in the first mode, lean shift of the average air-fuel ratio of the exhaust gas led to the first front catalyst is performed, rich shift of the air-fuel ratio of the exhaust gas led to the second front catalyst is performed, and a flag  $F_{mode}$  is set to 1. In the second mode, the air-fuel ratios are set oppositely from the case of the first mode. In other words, in the second mode wherein the first front catalyst side is rich, and the second front catalyst side is lean,  $F_{mode}$  is set to 0.

[0075] In S631, it is determined from the flag  $F_{sox}$  whether or not the conditions for discharging SOx from the rear catalyst have changed from holding to not holding. Alternatively, it may be determined whether or not these conditions have changed from not holding to holding.

[0076] When the flag has changed, it is determined in a step S632 whether or not the flag  $F_{mode}$  at that time is 1, and if it is,  $F_{mode}$  is set to 0 in S633, otherwise  $F_{mode}$  is set to 1 in S634.

[0077] That is, in S632-S634, the value of the present  $F_{mode}$  is determined and  $F_{mode}$  is set to a value different from the present value.

[0078] By so doing, the mode setting is changed alternately, a situation where one front catalyst is always exposed to lean exhaust and the other front catalyst is always exposed to rich exhaust during temperature increase control of the rear catalyst is prevented, and a large difference in the rate of deterioration of the front catalysts is avoided.

[0079] Fig. 6 is an air-fuel ratio control value setting routine (1), and it is performed at an interval of 10ms.

[0080] Here, the basic air-fuel ratio control parameters  $PL1$ ,  $PR1$ ,  $PL2$ ,  $PR2$ ,  $PHOSPL$ ,  $PHOSPR$ ,  $PHOSIL$  and  $PHOSIR$  are set based on the flags  $F_{sox}$ ,  $F_{heat}$ ,  $F_{rich}$  and  $F_{mode}$ .

[0081] Herein,  $PL1$ ,  $PR1$  are basic control constants of proportional control for computing an air-fuel ratio feedback control correction coefficient  $\alpha 1$  for the first cylinder group based on the  $O_2$  sensor output on the first front catalyst side ( $PL1$ : rich shift proportional gain,  $PR1$ : lean shift proportional gain). When  $PL1 > PR1$ , the control midpoint shifts to the rich side (the average air-fuel ratio of the exhaust gas led to the first front catalyst becomes richer), and when  $PL1 < PR1$ ,

the control midpoint shifts to the lean side.

[0082] Further,  $PL2$  and  $PR2$  are basic control constants for computing an air-fuel ratio feedback control correction coefficient  $\alpha 2$  of the second cylinder group based on the output of the  $O_2$  sensor on the second front catalyst side. When  $PL2 > PR2$ , the control midpoint value shifts to the rich side (the average air-fuel ratio of the exhaust gas led to the second front catalyst becomes richer), and when  $PL2 < PR2$ , the control midpoint value shifts to the lean side.

[0083]  $PHOSPL$ ,  $PHOSPR$ ,  $PHOSIL$ , and  $PHOSIR$  are basic control constants of proportional control and integral control for computing a correction value  $PHOS$  of dual  $O_2$  sensor feedback control by the two front  $O_2$  sensors based on the output of the rear  $O_2$  sensor. Specifically,  $PHOSPL$  = rich shift proportional gain,  $PHOSPR$  = lean shift proportional gain,  $PHOSIL$  = rich shift integral gain, and  $PHOSIR$  = lean shift integral gain.

[0084] When  $PHOSPL > PHOSPR$  or  $PHOSIL > PHOSIR$ , the control midpoint value shifts to the rich side (the average air-fuel ratio of the exhaust led to the rear catalyst becomes richer), and when  $PHOSPL < PHOSPR$  or  $PHOSIL < PHOSIR$ , the control midpoint value shifts to the lean side.

[0085] Specifically, when  $PHOSPL > PHOSPR$  or  $PHOSIL > PHOSIR$ , a correction value  $PHOS$  is computed which shifts the average air-fuel ratio of the exhaust gases led to the first and second front catalysts, to rich.

[0086] When  $PHOSPL < PHOSPR$  or  $PHOSIL < PHOSIR$ , a correction value  $PHOS$  is computed which shifts the average air-fuel ratio of the exhaust gases led to the first and second front catalysts, to lean.

[0087]  $DHOS$ ,  $DL1$ ,  $DR1$ ,  $DL2$  and  $DR2$  are control values of delay time control when the correction coefficients  $\alpha 1$ ,  $\alpha 2$  are computed, but in this embodiment, all of these are set to 0 and delay time control is not performed. Moreover, the set values  $PL1$ ,  $PR1$ ,  $PL2$  and  $PR2$  are used in the  $\alpha$  computing routine, and the set values  $PHOSPL$ ,  $PHOSPR$ ,  $PHOSIL$  and  $PHOSIR$  are used in the  $PHOS$  computing routine.

[0088] First  $DHOS$ ,  $DL1$ ,  $DR1$ ,  $DL2$  and  $DR2$  are all set to 0 in S301. In S302 it is determined whether or not  $F_{sox}=1$ , in S303 it is determined whether or not  $F_{heat}=1$ , in S304 it is determined whether or not  $F_{rich}=1$ , and in S305 it is determined whether or not  $F_{mode}=1$ . When all of these are affirmative, the routine proceeds to S306.

[0089] In S306, the values  $PHOSPL$ ,  $PHOSPR$ ,  $PHOSIL$  and  $PHOSIR$  are first set to the values  $PHOSPLR$ ,  $PHOSPRR$ ,  $PHOSILR$  and  $PHOSIRR$ , respectively.  $PHOSPLR$ ,  $PHOSPRR$ ,  $PHOSILR$  and  $PHOSIRR$  are values for computing the correction value  $PHOS$  which shifts the average air-fuel ratio of the exhaust gases to led to the rear catalyst, to richer than the stoichiometric air-fuel ratio.

[0090]  $PHOSPLR$ ,  $PHOSPRR$ ,  $PHOSILR$  and  $PHOSIRR$  are generally in the relations  $PHOSPLR > PHOSPRR$  and  $PHOSILR > PHOSIRR$ .

[0091]  $PHOSPLR$ ,  $PHOSPRR$ ,  $PHOSILR$  and  $PHOSIRR$  are stored in a memory (ROM) as single fixed values or as plural fixed values depending on the engine rotation speed and the load. Further, all or some of  $PHOSPLR$ ,  $PHOSPRR$  and  $PHOSILR$  may be variably set according to the SOx discharge amount, and in this case are stored in an updatable memory (RAM).

[0092] Next,  $PL1$  and  $PR1$  are set to values  $PLL$  and  $PRL$ .  $PLL$ ,  $PRL$  are values which shift the average air-fuel ratio of the exhaust gas led to the first front catalyst to leaner than the stoichiometric air-fuel ratio.  $PLL$ ,  $PRL$  are in the relation  $PLL < PRL$ . In addition,  $PLL$  and  $PRL$  are set so that the lean shift due to them is larger than the rich shift due to  $PHOSPLR$ ,  $PHOSPRR$ ,  $PHOSILR$  and  $PHOSIRR$ .  $PLL$ ,  $PRL$  are stored in a memory (ROM) as single fixed values or as plural fixed values depending on the engine rotation speed and the load.

[0093] Next,  $PL2$  and  $PR2$  are set to values  $PLR$  and  $PRR$ .  $PLR$ ,  $PRR$  are values which shift the average air-fuel ratio of the exhaust gas led to the second front catalyst to richer than the stoichiometric air-fuel ratio.  $PLR$ ,  $PRR$  are in the relation  $PLR < PRR$ .  $PLR$  and  $PRR$  are stored in a memory (ROM) as single fixed values or plural fixed values depending on the engine rotation speed and the load.

[0094] When air-fuel ratio feedback control of the first and second cylinder groups is performed using only  $PL1$ ,  $PR1$ , and  $PL2$ ,  $PR2$  (correction value  $PHOS = 0$ ), the values of  $PLL$ ,  $PRL$ ,  $PLR$ ,  $PRR$  are set so that the average air-fuel ratio of the two exhaust gases is effectively equal to the stoichiometric air-fuel ratio.

[0095] When the mode flag  $F_{mode}$  is not 1 in the above-mentioned S305, the routine proceeds to S307 and the air-fuel ratio mode of the two front catalysts is reversed.

[0096] For this purpose,  $PHOSPL$ ,  $PHOSPR$ ,  $PHOSIL$  and  $PHOSIR$  are set to the values  $PHOSPLR$ ,  $PHOSPRR$ ,  $PHOSILR$  and  $PHOSIRR$ , respectively. Also,  $PL1$  and  $PR1$  are set to the values  $PLR$  and  $PRR$  respectively, and  $PL2$  and  $PR2$  are set to the values  $PLL$  and  $PRL$  respectively.

[0097] The air-fuel ratio of the first front catalyst is thereby shifted to rich, and the air-fuel ratio of the second front catalyst is shifted to lean.

[0098] When the flag  $F_{rich}$  is not 1 in S304, the routine proceeds to S308 and it is determined whether or not  $F_{mode}=1$ . When the mode flag is 1,  $PHOSPL$ ,  $PHOSPR$ ,  $PHOSIL$  and  $PHOSIR$  are first set to the values  $PHOSPLS$ ,  $PHOSPRS$ ,  $PHOSILS$  and  $PHOSIRS$ , respectively.

[0099]  $PHOSPLS$ ,  $PHOSPRS$ ,  $PHOSILS$  and  $PHOSIRS$  are values for computing  $PHOS$  at which the average air-fuel ratio of the exhaust gas led to the rear catalyst is the stoichiometric air-fuel ratio.

[0100] In general, the values of  $PHOSPLS$  and  $PHOSPRS$  are almost equal, and the values of  $PHOSILS$  and  $PHOSIRS$

*SIRS* are almost equal. *PHOSPLS*, *PHOSPRS*, *PHOSILS* and *PHOSIRS* are stored in a memory (ROM) as single fixed values or plural fixed values depending on the engine rotation speed and the load.

[0101] Next, *PL1* and *PR1* are set to the values *PLL* and *PRL* respectively, and *PL2* and *PR2* are set to the values *PLR* and *PRR* to respectively.

[0102] Therefore, the air-fuel ratios of the exhaust gases led to the first and second front catalysts are lean or rich, but the air-fuel ratio of the exhaust gas led to the rear catalyst is controlled to the stoichiometric air-fuel ratio.

[0103] On the other hand, when the mode flag is not 1 in S308, the routine proceeds to S310 to reverse the mode.

[0104] In S310, after setting *PHOSPL*, *PHOSPR*, *PHOSIL* and *PHOSIR* to the values *PHOSPLS*, *PHOSPRS*, *PHOSILS* and *PHOSIRS* respectively, *PL1*, *PR1* are set to the values *PLR*, *PRR*, and *PL2*, *PR2* are set to the values *PLL*, *PRL*.

[0105] Here, the relation of the exhaust gas air-fuel ratio of the first and second front catalysts is reversed, the first front catalyst being rich and the second front catalyst being lean.

[0106] When the flag *Fheat* is not 1 in S303 (i.e., when temperature increase of the rear catalyst is not performed), the routine proceeds to S311. Here, if the flag *Frich*=1, *PHOSPL*, *PHOSPR*, *PHOSIL* and *PHOSIR* are first set to the values *PHOSPLR*, *PHOSPRR*, *PHOSILR* and *PHOSIRR* in S312. Subsequently, *PL1*, *PR1* are set to the values *PLS*, *PRS* respectively. *PLS* and *PRS* are values at which, independently of other factors, the average air-fuel ratio of the exhaust gases led to the front catalysts (correction value *PHOS*=0) is the stoichiometric air-fuel ratio.

[0107] In general, *PLS*, *PRS* are substantially equal. *PLS*, *PRS* are stored in a memory (ROM) as plural fixed values depending on the engine rotation speed and the load. *PL2*, *PR2* are also set to *PLS*, *PRS*, respectively.

[0108] When the rich flag *Frich* is not 1 in the above S311, the routine proceeds to S313.

[0109] In S313, *PHOSPL*, *PHOSPR*, *PHOSIL* and *PHOSIR* are set to the values *PHOSPLS*, *PHOSPRS*, *PHOSILS* and *PHOSIRS*, respectively. Next, *PL1*, *PR1* are set to the values *PLS*, *PRS* respectively, and *PL2*, *PR2* are set to the values *PLS*, *PRS* respectively.

[0110] However, *PL1*, *PR1*, *PL1*, *PR1*, *PHOSPL*, *PHOSPR*, *PHOSIL* and *PHOSIR* which are set by this routine are reflected in actual air-fuel ratio feedback control and dual O<sub>2</sub> sensor feedback control only while proportional control is being performed when the air-fuel ratio feedback correction coefficients  $\alpha_1$  and  $\alpha_2$  are computed, so this routine is performed with the same timing as that of proportional control.

[0111] Next, the routine shown in Fig. 7 is a routine (1) for setting the rich shift proportional gain and lean shift proportional gain *PHOSPLR* and *PHOSPRR*, and it is performed at an interval of 10ms.

[0112] This is used when *PHOSPLR*, *PHOSPRR* in the air-fuel ratio control value setting routine are variably set depending on the SO<sub>x</sub> discharge amount.

[0113] In S401, it is determined from the rich flag *Frich* whether or not the conditions hold for enriching the air-fuel ratio. When enriching conditions hold, the values of *PHOSPLR* and *PHOSPRR* are computed by functions *f1* and *f2* in S402.

[0114] In this case, the functions *f1* and *f2* are determined so that the rich shift amount has the following characteristics relative to various parameters.

(1) The extent of rich shift becomes smaller the lower the SO<sub>x</sub> absorption amount, and is 0 when the absorption amount is 0.

(2) The extent of rich shift becomes smaller the lower the catalyst temperature, and is 0 below the SO<sub>x</sub> discharge temperature.

[0115] When *PHOSPLR* > *PHOSPRR*, the extent of rich shift is larger the larger the difference between *PHOSPLR* and *PHOSPRR*.

[0116] Fig. 8 is a routine (1) for computing the correction value *PHOS*. It is performed every time proportional control of air-fuel ratio feedback control is performed, and computes the correction value *PHOS* of dual O<sub>2</sub> sensor feedback control.

[0117] This *PHOS* is reflected in proportional control of air-fuel ratio feedback control and varies the balance of rich shift proportional control and lean shift proportional control.

[0118] When the value of *PHOS* is positive, the control midpoint value of air-fuel ratio feedback control is shifted to the rich side, and when the value of *PHOS* is negative, the control midpoint value is shifted to the lean side. This computed *PHOS* is used in the routine for computing the correction coefficient  $\alpha$ .

[0119] First, in S281, A/D conversion of the output of the rear O<sub>2</sub> sensor is performed, and an oxygen concentration signal *OSR* is calculated. In S282, it is determined whether or not the rear air-fuel ratio feedback (rear F/B) conditions hold.

[0120] When the following conditions (1) and (2) are satisfied, it is considered that the rear F/B conditions hold.

(1) Activation of the rear O<sub>2</sub> sensor is complete.



(2) Air-fuel ratio feedback control conditions (F/B conditions) of the front O<sub>2</sub> sensors hold.

[0121] When F/B conditions hold, an oxygen concentration signal *OSR* is compared with a slice level *SLR* in S283.

[0122] Based on the comparison result, the correction value *PHOS* of dual O<sub>2</sub> sensor feedback control is computed by proportional control using basic control constants (rich shift proportional gain *PHOSPL* and lean shift proportional gain *PHOSPR*), and integral control using basic control constants (rich shift integral gain *PHOSIL* and lean shift integral gain *PHOSIL*). Specifically, if  $OSR < SLR$ , a flag *F21* is set to 0 in S284, otherwise the flag *F21* is set to 1 in S285.

[0123] In S286, it is determined whether or not *F21* was reversed, and when it was reversed, it is determined whether or not the flag *F21*=0 in S287. When *F21*=0, the correction value *PHOS* of dual O<sub>2</sub> sensor feedback control is computed as  $PHOS = PHOS_z + PHOSPL$  in S288. The subscript *z* attached to the correction value *PHOS* shows the value on the immediately preceding occasion.

[0124] On the other hand, when the flag *F21* is not 0 in S287, *PHOS* is computed as  $PHOS = PHOS_z - PHOSPL$  in S289.

[0125] When the flag *F21* was not reversed in S286, the routine proceeds to S290 and it is determined whether or not *F21*=0. When the flag is 0, *PHOS* is computed as  $PHOS = PHOS_z + PHOSIL$  in S291, conversely, when *F21* is not 0 in S290, the routine proceeds to S292 and *PHOS* is computed as  $PHOS = PHOS_z - PHOSIL$ .

[0126] Fig. 9 is a routine (1) for computing the air-fuel ratio feedback correction coefficient  $\alpha 1$  of the first cylinder group, and it is performed at an interval of 10ms.

[0127] Here, the correction coefficient  $\alpha 1$  of the air-fuel ratio feedback control of the first cylinder group is computed, and the computed correction coefficient  $\alpha 1$  is used in computing fuel injection amount and fuel injection timing in the routine for computing *Ti* and *TITM*.

[0128] First, in S221, A/D conversion of the output of the first front O<sub>2</sub> sensor is performed, and an oxygen concentration signal *OSF1* is calculated. In S222, it is determined whether or not feedback control conditions, i.e., F/B conditions, hold.

[0129] In this case, when all of the following conditions (1)-(3) hold, it is assumed that F/B conditions hold.

- (1) the activation of the first and second front O<sub>2</sub> sensors is complete,
- (2) a fuel increase coefficient *COEF*=1 (fuel increase controls immediately after engine startup are complete).
- (3) The target equivalent ratio *TFBYA*=1 (the target air-fuel ratio is the stoichiometric air-fuel ratio)

[0130] When F/B conditions hold, as shown also in Fig. 18, the air-fuel ratio feedback correction coefficient  $\alpha 1$  is computed as follows by proportional control using basic control constants (rich shift proportional gain *PL1* and lean shift proportional gain *PR1*) and the correction value *PHOS*, integral control using basic control constants (rich shift integral gain *IL1* and lean shift integral gain *IR1*), and delay time control using basic control constants (rich shift delay time *DL1*, lean shift delay time *DR1*) and the correction value *DHOS*, based on the result of comparing the oxygen concentration signal *OSF1* and a slice level *SLF1* in S223.

[0131] Specifically, when  $OSF1 < SLF1$  in S223, an air-fuel ratio inversion flag *F11* is set to 0 in S224, otherwise the flag *F11* is set to 1 in S225.

[0132] In S226, it is determined whether or not *F11* was reversed, and if it was, a timer *TIMER1* is set to 0 in S227.

[0133] On the other hand, when it was not reversed, the routine proceeds to S228, the timer *TIMER1* is incremented, and *TIMER1* is set to  $TIMER1_z + \Delta T$ . The subscript *z* denotes the value on the immediately preceding occasion (value computed 10ms earlier).

[0134] In S229, it is determined whether or not the flag *F11*=0, and when it is 0, it is determined whether or not the timer  $TIMER1 > DL1 + DHOS$  in S230. *DL1* is a rich shift delay time, and *DHOS* is a correction value.

[0135] According to this embodiment, as delay time control is not performed, the result of S230 is never NO, and the routine proceeds to S231.

[0136] In S231, it is determined whether or not *N1*=0, and if *N1*=0, *N1* is set to 1 in S232, and the correction coefficient  $\alpha 1$  is computed from  $\alpha 1 = \alpha 1_z + PL1 + PHOS$  in S233.

On the other hand, when *N1* is not 0 in S231, the routine proceeds to S234 and the correction coefficient  $\alpha 1$  is computed as  $\alpha 1 = \alpha 1_z + IL1$ .

[0137] When *F11* is not 0 in S229, the routine proceeds to S235 and subsequent steps.

[0138] In S235, it is determined whether or not  $TIMER1 > DR1 + DHOS$ , and when this relation holds, it is determined whether or not *N1*=1 in S236. If *N1*=1, *N1* is set to 0 in S237, and the correction coefficient  $\alpha 1$  is computed from  $\alpha 1 = \alpha 1_z - PR1 + PHOS$  in S238.

[0139] When *N1* is not 1 in S236, the routine proceeds to S239 and  $\alpha 1$  is computed from  $\alpha 1 = \alpha 1_z - IR1$ .

[0140] When F/B conditions do not hold, in S240, the correction coefficient  $\alpha 1$  is clamped to  $\alpha 1=1$ .

[0141] In this type of control, delay time control is not performed as described above, so the results of S230 and S235 are never NO, proportional control is performed immediately after inversion of the flag *F11*, and integral control is performed when the flag *F11* is not inverted.

[0142] Next, Fig. 10 is a routine (2) for computing the correction coefficient  $\alpha_2$  of the second cylinder group, and this is performed at an interval of 10ms.

[0143] Herein, when F/B conditions hold in S251-S253, the air-fuel ratio feedback correction coefficient  $\alpha_2$  for the second cylinder group is computed in S254-S269 by proportional control using basic control constants (rich shift proportional gain  $PL2$  and lean shift proportional gain  $PR2$ ) and the correction value  $PHOS$ , integral control using basic control constants (rich shift integral gain  $IL2$  and lean shift integral gain  $IR2$ ), and delay time control using basic control constants (rich shift delay time  $DL2$ , lean shift delay time  $DR2$ ) and the correction value  $DHOS$ , based on the result of comparing the oxygen concentration signal  $OSF2$  and a slice level  $SLF2$  in S223, as was described for the above Fig. 9. The control routine is the same as that for computing the correction coefficient  $\alpha_1$  of the first cylinder group, so a detailed description here is omitted.

[0144] Fig. 11 is a routine (1) which sets a target air-fuel ratio, and this is performed at an interval of 10ms.

[0145] Here, the target air-fuel ratio (target equivalent ratio) is set depending on the running conditions. This set target equivalent ratio is used for computing the fuel injection amount in a routine for computing the fuel injection amount, injection timing  $Ti$  and  $TITM$ , and also in other routines as a value representing the air-fuel ratio.

[0146] In S101, the engine rotation speed  $N$  is calculated based on the occurrence interval of a predetermined signal from the crank angle sensor, and the engine load  $T$  is calculated based on the output of the accelerator position sensor (for example, a target generation torque of the engine according to the accelerator depression amount).

[0147] In S102, the target equivalent ratio  $TFBYA$  is looked up based on the engine rotation speed  $N$  and engine load  $T$  from a target equivalent ratio setting map.

[0148] Here, target equivalent ratio = stoichiometric air-fuel ratio/target air-fuel ratio. Therefore, it is the stoichiometric air-fuel ratio when  $TFBYA$  is 1, a rich air-fuel ratio when  $TFBYA > 1$  and a lean air-fuel ratio when  $TFBYA < 1$ . However, when  $TFBYA = 1$ , rich shift control may be performed.

[0149] In S103, by determining whether or not the flag  $Frch = 1$ , it is determined whether or not the conditions for performing rich shift of the air-fuel ratio are satisfied.  $Frch$  is a flag for performing SOx removal control of the rear catalyst. It is 1 when the conditions hold for shifting the air-fuel ratio to rich, and 0 when these conditions do not hold.

[0150] In S104, it is determined whether or not  $TFBYA$  which was looked up from a map is less than 1, and when it is less than 1,  $TFBYA$  is set to 1 in S105.

[0151] Therefore, by the processing of S103-S105, when the conditions for performing rich shift of the air-fuel ratio are satisfied,  $TFBYA$  is 1 even if the running conditions are in the lean air-fuel ratio running region. That is, once removal control has started, rich shift control is continued without migrating to lean running for as long as removal is possible (i.e., while the catalyst temperature is higher than the SOx discharge temperature).

[0152] Fig. 12 is a routine (1) for computing fuel injection amount, fuel injection timing  $Ti$  and  $TITM$ , and it is performed at an interval of 10ms.

[0153] Here, a fuel injection amount  $Ti1$  and fuel injection timing  $TITM1$  of the first cylinder group are computed. The computed  $Ti1$  and  $TITM1$  are stored in the memory of a control unit (ECM), and are read and used in the fuel injection routine which is performed in synchronism with the engine rotation.

[0154] For example, fuel injection is performed by applying a valve opening signal to a fuel injection valve which starts at a crank angle defined by  $TITM1$ , and continuing application of the valve opening signal for a time obtained by adding an ineffectual pulse width  $Ts$  to  $Ti1$ .

[0155] In S011, the output of an air flow meter is A/D converted to calculate an intake air amount  $Qa$ , and the engine rotation speed  $N$  is calculated based on the occurrence interval of a predetermined signal of the crank angle sensor.

[0156] In S012, based on these parameters, a basic injection amount  $Tp$  (fuel amount corresponding to stoichiometric air-fuel ratio) is computed as  $Tp = K \cdot Qa / N$  where  $K$  is a coefficient.

[0157] In S013, this basic injection amount  $Tp$  is corrected by the target equivalent ratio  $TFBYA$ , various fuel increase correction coefficients  $COEFs$  and the air-fuel ratio feedback correction coefficient  $\alpha_1$  to compute the fuel injection amount  $Ti1$ , i.e.,  $Ti1 = Tp \times TFBYA \times COEF \times \alpha_1$ .

[0158]  $COEF$  include a post-startup fuel increase correction coefficient and a water temperature increase correction coefficient, and when engine warmup is complete,  $COEF = 1$ .

[0159] In S014, the fuel injection timing  $TITM1$  is computed based on the computed  $Ti1$  and engine rotation speed  $N$ .

[0160] According to this embodiment, it is desired to achieve stratified combustion when running at a lean air-fuel ratio, and uniform combustion when running at the stoichiometric air-fuel ratio or a rich air-fuel ratio. To obtain stratified combustion during lean running, the fuel injection timing  $TITM1$  is set in the compression stroke, and to obtain premixed combustion when running at the stoichiometric air-fuel ratio or a rich air-fuel ratio, the fuel injection timing  $TITM1$  is set in the intake stroke.

[0161] Fig. 13 is a routine (2) for computing the fuel injection amount, fuel injection timing  $Ti$  and  $TITM$ , and it is performed at an interval of 10ms.

[0162] Here, a fuel injection amount  $Ti2$  and fuel injection timing  $TITM2$  of the second cylinder group are computed.

[0163] Regarding the specific details of this control, except that  $\alpha_2$  is used instead of  $\alpha_1$  as a correction coefficient,

the control is the same as that of the first cylinder group shown in Fig. 12 described above, and a detailed description here is omitted.

[0164] Fig. 14 is a routine (1) for setting an ignition timing *ADV*, and it is performed at an interval of 10ms.

[0165] Here, the ignition timing *ADV* is set based on the flag *Fheat*, and based on the set *ADV*, an ignition signal is output to the spark plug by an ignition control routine, not shown.

[0166] For this purpose, firstly in S701, it is determined from the flag *Fheat* whether or not the conditions for raising the temperature of the rear catalyst hold. When temperature increase control should be performed, the routine proceeds to S702, and the ignition timing *ADV* is computed by subtracting a predetermined retardation angle correction value *RTD* from an ignition timing *ADVC* preset according to running conditions (engine rotation speed *N* and engine load *T*). When temperature increase is not performed, the ignition timing *ADV* is set to *ADVC* in S713.

[0167] Here, *ADVC* is set for example as a timing at which the engine output is maximized provided that knocking does not occur.

[0168] When the ignition timing is thus retarded, the combustion timing is delayed so the exhaust gas temperature is increased.

[0169] Fig. 15 is a routine (1) for setting an opening timing *EVO* of the exhaust valve, and it is performed at an interval of 10ms.

[0170] Here, the opening timing *EVO* of the exhaust valve is set based on the flag *Fheat*, and a drive signal is output to a valve control mechanism by a dynamic valve control routine, not shown, so as to obtain the set *EVO*.

[0171] Specifically, in S711, it is first determined from *Fheat* whether or not the conditions for increasing the temperature of the rear catalyst hold.

[0172] When temperature increase control is performed, in S712, the exhaust valve opening timing *EVO* is set to a position advanced to the usual timing. On the other hand, when temperature increase control is not performed, *EVO* is set to the usual position in S713.

[0173] In this case, when the exhaust gas valve opening timing is advanced, gas from the combustion chamber at the end of the expansion stroke flows into the exhaust gas passage, so the exhaust gas temperature rises.

[0174] Fig. 16 is a routine for setting a valve aperture of the EGR valve, and it is performed at an interval of 10 ms.

[0175] Here, the EGR valve aperture is determined from the flag *Fheat*, and a driving signal is output to the EGR valve at a routine not shown.

[0176] Specifically, in S731, it is first determined from flag *Fheat* whether or not the conditions for increasing the temperature of the rear catalyst hold. When the temperature increasing control is performed, in S732, the EGR valve aperture *EGR* is set to 0 to prevent a EGR gas from circulating to the intake passage by closing the EGR valve. On the other hand, when the temperature increasing control is not performed, the EGR aperture *EGR* is set to a predetermined value *EGRC* based on the running conditions (engine rotation speed, engine load). In this case, an exhaust gas temperature rises due to increasing of a combustion temperature when the EGR gas circulation is stopped.

[0177] The elimination of SOx from the rear catalyst when the above controls are performed will now be described referring to the time chart of Fig. 19.

[0178] In order to simplify the description, it will be assumed that the running conditions are in region A of Fig. 2, and that *Fmode*=1 (the first mode wherein the first front catalyst is lean and the second front catalyst is rich during temperature increase control).

[0179] It will be assumed that the SOx which has been absorbed and accumulated by the rear catalyst has reached a predetermined amount, and the conditions for discharging hold (*Fsox*=1) at a time *t1*, as shown in the figure.

[0180] During an interval *t1*-*t2*, the first front catalyst temperature *Tcat1* is low, and the conditions for increasing the temperature of the rear catalyst do not hold (*Fheat*=0). Ordinary control is therefore performed with the air-fuel ratio at the stoichiometric air-fuel ratio, and the system waits for the catalyst temperature to rise under ordinary control. It should be noted that when the vehicle is run at the stoichiometric air-fuel ratio during ordinary control, the average air-fuel ratios of both the first and second cylinder groups are controlled to the stoichiometric air-fuel ratio.

[0181] During an interval *t2*-*t3*, temperature increase conditions are satisfied (*Fheat*=1) and due to the setting of *PL1* and *PR1*, the average air-fuel ratio of the exhaust led to the first front catalyst (average air-fuel ratio of the first cylinder group) is shifted to lean from the stoichiometric air-fuel ratio.

[0182] In this period, the purifying efficiency of the first front catalyst falls, and excess oxygen flows through the first front catalyst.

[0183] Also, due to the setting of *PL2* and *PR2*, the average air-fuel ratio of the exhaust led to the second front catalyst (average air-fuel ratio of the second cylinder group) is shifted to rich from the stoichiometric air-fuel ratio. Therefore, the purifying efficiency of the second front catalyst falls, and excess unburnt fuel components flow through the second front catalyst.

[0184] In this case, as the catalytic reactions in both of the front catalysts is suppressed, the temperatures of both the front catalysts do not rise, however the lean exhaust gas and rich exhaust gas which have flowed through the front catalysts react in the rear catalyst, and the temperature of the rear catalyst therefore rises.

[0185] Here, due to the setting of *PHOSPLS*, *PHOSPRS*, *PHOSILS* and *PHOSIRS*, the value of *PHOS* is a value at which the average air-fuel ratio of the exhaust gas led to the rear catalyst is the stoichiometric air-fuel ratio, and the average air-fuel ratio of the exhaust led to the rear catalyst is effectively the stoichiometric air-fuel ratio. In other words, the amount of excess oxygen flowing through the first front catalyst and the amount of excess unburnt fuel components flowing through the second front catalyst are substantially the same (exactly the amounts necessary for reaction), and the catalytic reaction in the rear catalyst is therefore performed most efficiently.

[0186] Therefore, the temperature increase effect on burnt fuel in the rear catalyst can be maximized. Also, by performing retardation angle control of the ignition timing, advance angle control of the exhaust valve opening timing and closing control of EGR valve aperture, exhaust gas temperature is increased and the temperature rise of the rear catalyst is assisted.

[0187] During an interval *t3-t4*, as the temperature *Tcat* of the rear catalyst has reached a SOx discharge temperature *Tcat2*, *Frich*=1, and due to the setting of *PHOSPLR*, *PHOSPRR*, *PHOSILR* and *PHOSIRR*, the value of *PHOS* is a value at which the average air-fuel ratio of the exhaust led to the rear catalyst is shifted to rich. The average air-fuel ratio of the exhaust led to the rear catalyst is therefore shifted to rich from the stoichiometric air-fuel ratio.

[0188] Due to this rich shift, the discharge of SOx which was absorbed and deposited by the rear catalyst is promoted, and reduction purification of the discharged SOx is performed by unburnt fuel in the rear catalyst.

[0189] In the first cylinder group, as the lean shift due to *PL1* and *PR1* and the rich shift due to *PHOS* are performed simultaneously, the lean shift is less than during the period *t2-t3*. Likewise in the second cylinder group, as the rich shift due to *PL2* and *PR2* and the rich shift due to *PHOS* are performed simultaneously, the rich shift is larger than during the period *t2-t3*.

[0190] For this reason, although the amount of excess unburnt fuel led to the rear catalyst increases, the amount of excess oxygen decreases and the temperature increase effect of the rear catalyst is less than during the period *t2-t3*. However although the temperature increase effect is less, there is no problem as the SOx discharge temperature has already been reached, and the temperature rises gradually which is desirable from the viewpoint of durability of the rear catalyst.

[0191] During an interval *t4-t5*, as the rear catalyst temperature *Tcat* has reached a predetermined upper limiting value *Tcat3*, *Fheat*=0, and by setting *PLS*, *PRS*, rich shift and lean shift control for each cylinder group is stopped. However, since the rich shift due to the setting of *PHOSPLR*, *PHOSPRR*, *PHOSILR* and *PHOSIRR* continues, the average air-fuel ratio of both cylinder groups is shifted to rich from the stoichiometric air-fuel ratio.

[0192] Due to this, excessive temperature rise of the rear catalyst above *Tcat3* is suppressed, and catalyst durability is ensured.

[0193] During an interval *t5-t6*, the rear catalyst temperature falls to *Tcat3* or below, so temperature increasing control and SOx discharge and reduction are performed again. The details of this control are identical to those of the control performed during the interval *t3-t4*.

[0194] During an interval *t6-t7*, the catalyst temperature *Tcat* reaches an upper limiting value *Tcat3* during SOx discharge/reduction control, so to suppress further temperature rise, the flag *Fheat* is set to 0 and the same control is performed as during the interval *t4-t5*.

[0195] At a time *t7*, the flag *Fsox*=0, and discharge of SOx deposited on the rear catalyst is complete. SOx removal control of the rear catalyst is therefore terminated, and the routine returns to ordinary air-fuel ratio control.

[0196] When SOx removal is performed in the rear catalyst, the air-fuel ratios are lean and rich in the two front catalysts and temperature rise due to catalytic reactions is suppressed. Hence, temperature increase in the rear catalyst is performed effectively while maintaining durability of the front catalysts, and a satisfactory SOx discharge/reduction effect is achieved.

[0197] While *Fmode*=0 and temperature increase control is performed, the average air-fuel ratio of the first cylinder group is rich and the average air-fuel ratio of the second cylinder group is lean, the remaining features being essentially identical to those described above. When the first and second modes are changed over, the air-fuel ratios of the exhaust gas flowing into the first and second front three-way catalysts are alternately changed over between rich and lean, so catalyst deterioration is subject to the same conditions on both sides and the durability of the catalyst is enhanced.

[0198] Next, a second embodiment will be described.

[0199] In this embodiment, only the air-fuel ratio control value setting routine is different from that of the first embodiment.

[0200] Fig. 20 is a routine (2) for setting an air-fuel ratio control value, and it is performed at an interval of 10ms.

[0201] The basic control constants *DL1*, *DR1*, *DL2* and *DR2*, and the correction value *PHOS*, are set based on the flags *Fsox*, *Fheat*, *Frich* and *Fmode*. However according to this embodiment, the difference from the first embodiment is that whereas the value of the correction value *PHOS* is computed based on the rear O2 sensor output during ordinary running when the conditions for discharging SOx absorbed by the rear catalyst do not hold, the value of *PHOS* is set by open control when they do hold.

[0202] Consequently, according to this embodiment, rear F/B conditions of the *PHOS* computing routine are as fol-

lows:

- (1) The activation of the rear  $O_2$  sensor is complete.
- (2) F/B conditions of the front  $O_2$  sensor hold.
- (3) SOx discharge conditions do not hold ( $F_{sox}=0$ ).

[0203]  $DL1$ ,  $DR1$  are basic control constants of delay time control when the correction coefficient  $\alpha 1$  of air-fuel ratio feedback control of the first cylinder group is computed based on the first front  $O_2$  sensor output. The rich shift delay time  $DL1$  sets the delay time from when the first front  $O_2$  sensor output inverts from rich to lean, to when rich shift proportional control is performed, and the lean shift delay time  $DR1$  sets the delay time from when the first front  $O_2$  sensor output inverts from lean to rich, to when lean shift proportional control is performed. When  $DL1 > DR1$ , the control midpoint (= average air-fuel ratio of exhaust gas led to the first front catalyst) is shifted to lean, and when  $DL1 < DR1$ , the control midpoint value is shifted to rich.

[0204]  $DL2$ ,  $DR2$  are basic control constants of delay time control when the correction coefficient  $\alpha 2$  of air-fuel ratio feedback control of the second cylinder group is computed based on the second front  $O_2$  sensor output. The rich shift delay time  $DL2$  sets the delay time from when the second front  $O_2$  sensor output inverts from rich to lean, to when rich shift proportional control is performed, and the lean shift delay time  $DR2$  sets the delay time from when the second front  $O_2$  sensor output inverts from lean to rich, to when lean shift proportional control is performed. When  $DL2 > DR2$ , the control midpoint value (= average air-fuel ratio of exhaust gas led to the second front catalyst) is shifted to lean, and when  $DL2 < DR2$ , the control midpoint value is shifted to rich.

[0205]  $DHOS$  is a correction value of delay time control, but according to this embodiment, this value is set to a fixed value and the delay time control correction is not performed. Also, by setting the values of the basic control constants  $PL1$ ,  $PL2$  of proportional control to  $PLS$ , and setting the values of  $PR1$ ,  $PR2$  to  $PRS$ , a rich/lean shift for each cylinder group is not generated. The set  $DL1$ ,  $DR1$ ,  $DL2$ ,  $DR2$  and  $PHOS$  are used by the routine for computing the correction coefficient  $\alpha$ .

[0206] The set  $PHOSPL$ ,  $PHOSPR$ ,  $PHOSIL$  and  $PHOSIR$  are used by the routine for computing the correction value  $PHOS$ .

[0207] In S321,  $DHOS=DHOSS$  (it may be 0),  $PL1=PLS$ ,  $PR1=PRS$ ,  $PL2=PLS$  and  $PR2=PRS$  are respectively set, and in S322, it is determined whether SOx discharge conditions hold from the flag  $F_{sox}$ .

[0208] When it is determined that these conditions hold, temperature rise is determined from  $F_{heat}$  in S323, rich shift is determined from  $F_{rich}$  in S324 and air-fuel ratio mode is determined from  $F_{mode}$  in S325, respectively, and when all of these are affirmative, the routine proceeds to S326.

[0209] In S326, the value  $PHOSR$  is first set to  $PHOS$ .  $PHOSR$  is the value by which the average air-fuel ratio of the exhaust led to the rear catalyst is shifted to rich from the stoichiometric air-fuel ratio.  $PHOSR$  is stored in a memory (ROM) as a single fixed value or as plural fixed values depending on the engine rotation speed and the load. Alternatively,  $PHOSR$  may be variably set according to the SOx discharge amount, and in this case is stored in an updatable memory (RAM).

[0210] Also,  $DL1$  and  $DR1$  are set to the values  $DLL$ ,  $DRL$ .  $DLL$ ,  $DRL$  are values which shift the average air-fuel ratio of the exhaust led to the first front catalyst to lean from the stoichiometric air-fuel ratio.

[0211] In general,  $DLL$ ,  $DRL$  are in the relation  $DLL > DRL$ , and  $DRL$  may also be 0. Also, the values of  $DLL$ ,  $DRL$  are set so that the lean shift due to  $DLL$  and  $DRL$  is larger than the rich shift due to  $PHOSR$ . As in the above-mentioned cases,  $DLL$ ,  $DRL$  are stored in a memory (ROM) as single fixed values or as plural fixed values depending on the engine rotation speed and the load.

[0212] Further,  $DL2$  and  $DR2$  are set to the values  $DLR$ ,  $DRR$ .  $DLR$ ,  $DRR$  are values which shift the average air-fuel ratio of the exhaust led to the second front catalyst to rich from the stoichiometric air-fuel ratio.

[0213] In general,  $DLR$ ,  $DRR$  are in the relation  $DLR < DRR$ , and  $DLR$  may also be 0.  $DLR$ ,  $DRR$  are stored in a memory (ROM) as single fixed values or as plural fixed values depending on the engine rotation speed and the load.

[0214] The values of  $DLL$ ,  $DRL$ ,  $DLR$  and  $DRR$  are set so that when air-fuel ratio feedback control of the first and second cylinder groups is performed using only  $DL1$ ,  $DR1$ ,  $DL2$  and  $DR2$  (i.e., when the correction value  $PHOS=0$ ), the average air-fuel ratio of the combined exhaust gases is equal to the stoichiometric air-fuel ratio.

[0215] When  $F_{mode}$  is not 1 in S325,  $PHOS$  is first set to the value  $PHOSR$  in S327. Also,  $DL1$ ,  $DR1$  are set to the values  $DLR$ ,  $DRR$ , and  $DL2$ ,  $DR2$  are set to the values  $DLL$ ,  $DRL$ .

[0216] Due to this, the exhaust gas air-fuel ratio of the first front catalyst is rich, and the exhaust gas air-fuel ratio of the second front catalyst is lean.

[0217] When  $F_{rich}$  is not 1 in S324, it is determined whether or not  $F_{mode}=1$  in S328, and if the result is affirmative,  $PHOS$  is set to the value  $PHOSS$  in S329.

[0218] Here,  $PHOSS$  is a value at which the average air-fuel ratio of the exhaust gas led to the rear catalyst is the stoichiometric air-fuel ratio.  $PHOSS$  is stored in a memory (ROM) as a single fixed value or as plural fixed values.

depending on the engine rotation speed and the load.

[0219] As the values of *DLL*, *DRL*, *DLR* and *DRR* are set so that the average air-fuel ratios of the combined exhaust gases is equal to the stoichiometric air-fuel ratio when air-fuel ratio feedback control of the first and second cylinder groups is performed only by *DL1*, *DR1*, *DL2* and *DR2*, *PHOSS* may be set to 0. Alternatively, the average value of

*PHOS* computed during air-fuel ratio feedback control of using rear  $O_2$  sensor may be used as *PHOSS*.

[0220] Further, *DL1*, *DR1* are set to the values *DLL*, *DRL*, and *DL2*, *DR2* are set to the values *DLR*, *DRR*.

[0221] In S330, *PHOS* is set to the value *PHOSS*. Also, *DL1*, *DR1* are set to the values *DLR*, *DRR*, and *DL2*, *DR2* are set to the values *DLL*, *DRL*.

[0222] When *Fheat* is not 1 in S323, the routine proceeds to S331 and it is determined whether or not *Frich*=1. When the result is affirmative, the routine proceeds to S332.

[0223] In S332, *PHOS* is set to the value *PHOSR*, and *DL1*, *DR1* are set to a value *DS*. By making *DL1* and *DR1* equal in this way, a shift of the air-fuel ratio due to an imbalance of delay time control does not occur, and if there is no imbalance of proportional control, the average air-fuel ratios of the exhaust gases led to the front catalysts will be equal to the stoichiometric air-fuel ratio.

[0224] Here, *DS* is stored in a memory (ROM) as a single value or as plural values depending on the engine rotation speed and the load. The value of *DS* may be 0, or it may be set to a control period of the same order as *DLL*, *DRL*, *DLR* and *DRR* when air-fuel ratio feedback control is performed.

[0225] Likewise, *DL2*, *DR2* are set to the value *DS*.

[0226] In S333, *PHOS* is set to the value *PHOSS*. Further, *DL1*, *DR1* are set to the value *DS*, and *DL2*, *DR2* are set to the value *DS*.

[0227] In S334, when SOx removal control is not performed, i.e., during ordinary running, dual  $O_2$  sensor feedback control is performed by the rear  $O_2$  sensors, and basic control constants for this feedback control are set. Specifically, *PHOSPL*=*PHOSPLS*, *PHOSR*=*PHOSRS*, *PHOSIL*=*PHOSILS* and *PHOSIR*=*PHOSIRS*. Further, *DL1*, *DR1* are set to the value *DS*, and *DL2*, *DR2* are set to the value *DS*.

[0228] Here, when the air-fuel ratio is shifted by air-fuel ratio feedback control, there is an advantage in that the shift amount is more stable than if the air-fuel ratio were shifted by air-fuel ratio open control.

[0229] However when the air-fuel ratio is shifted by air-fuel ratio feedback control, although the average air-fuel ratio is shifted to rich or lean from the stoichiometric air-fuel ratio, the instantaneous air-fuel ratio momentarily oscillates to rich and lean on either side of the stoichiometric air-fuel ratio, as also shown in Fig. 22.

[0230] For this reason, even when a lean shift of the first cylinder group and a rich shift of the second cylinder group are performed, for example, a moment occurs when exhaust gas leaner than the stoichiometric air-fuel ratio is discharged from both cylinder groups, and a moment when exhaust gas richer than the stoichiometric air-fuel ratio is discharged from both cylinder groups. The rear catalyst has the ability to store excess oxygen in the exhaust gas, so there is no problem if there is some overlap of a lean or rich air-fuel ratio. Nevertheless, if this lean or rich overlap were to continue for a long period of time, there is a possibility that the temperature increase efficiency of the rear catalyst would be correspondingly less.

[0231] However when delay time control is performed on the rich and lean shift of the first and second cylinder groups as in the case of this embodiment, the lean exhaust gas or rich exhaust gas overlap time is shortened as compared with the first embodiment where proportional control was performed, as shown by the lower part of Fig. 22, and it is therefore easy to ensure good temperature increase efficiency in the rear catalyst.

[0232] When the air-fuel ratio is shifted by delay time control of air-fuel ratio feedback control, in addition to the setting of a delay time such as *DL1*, a limit may be set on the delay time by a rich surface area equivalent amount or a lean surface area equivalent amount of the correction coefficients  $\alpha 1$ ,  $\alpha 2$ .

[0233] Fig. 21 is a *PHOSR* setting routine (1), and it is performed at an interval of 10ms. This is used when *PHOSR* of the air-fuel ratio control value setting routine (2) is set variably in conjunction with the SOx discharge amount.

[0234] In S411, it is determined whether or not the conditions hold for enriching the air-fuel ratio, i.e., whether or not *Frich*=1. When these conditions hold, the value of *PHOSR* is computed by a function *f3* in S412.

[0235] The function *f3* is here determined so that the degree of rich shift has the following characteristics relative to various parameters.

(1) The degree of rich shift is smaller the smaller the SOx discharge amount in the rear catalyst, and is 0 when SOx is 0.

(2) The degree of rich shift is smaller the lower the catalyst temperature, and is 0 when the catalyst temperature is below the SOx discharge temperature.

[0236] The air-fuel ratio is enriched according to the SOx amount absorbed and deposited by the rear catalyst, so there is no unnecessary enrichment of the air-fuel ratio and fuel consumption losses are reduced.

[0237] Next, a third embodiment will be described. According to the third embodiment, the only difference from the

first embodiment is the air-fuel ratio control value setting routine.

[0238] Fig. 23 is an air-fuel ratio control value setting routine (3), and it is performed at an interval of 10ms.

[0239] Herein, basic control constants *DL1*, *DR1*, *DL2*, *DR2* and the correction values *PHOS*, *DHOS* are set based on the flags *Fsox*, *Fheaf*, *Frich* and *Fmode* as described above.

[0240] According to this embodiment, under ordinary running conditions when the conditions for discharging SOx absorbed in the rear catalyst do not hold, the value of the correction *PHOS* is computed based on the output of the rear O<sub>2</sub> sensor, and when the conditions do hold, the value of *PHOS* is set by open control. As a result, according to this embodiment, the rear catalyst F/B conditions of the *PHOS* computing routine are as follows.

- (1) Activation of the rear O<sub>2</sub> sensor is complete.
- (2) F/B conditions of the front O<sub>2</sub> hold.
- (3) The conditions for discharging SOx do not hold (*Fsox*=0).

[0241] The correction value *DHOS* is reflected in delay time control of air-fuel ratio feedback control, and changes the balance between rich shift delay time and lean shift delay time. When the value of *DHOS* is positive, the control midpoint value of air-fuel ratio feedback control is shifted to rich, and when the value of *DHOS* is negative, the control midpoint value is shifted to lean.

[0242] Also, by setting the values of *PL1*, *PL2* to *PLS*, and the values of *PR1*, *PR2* to *PRS*, it is arranged that a rich or lean shift for each cylinder group does not occur in proportional control.

[0243] The set *DL1*, *DR1*, *DL2*, *DR2*, *PHOS* and *DHOS* are used in the routine for computing the correction coefficient  $\alpha$ , and *PHOSPL*, *PHOSPR*, *PHOSIL* and *PHOSIR* which were similarly set are used in the routine for computing *PHOS*.

[0244] Steps S341-S345 are the same as those of the air-fuel ratio control value setting routine (2) of the above-mentioned second embodiment, and are therefore omitted.

[0245] In S346, *PHOS* is first set to the value *PHOSS*, and *DHOS* is set to the value *DHOSR*. Here, *DHOSR* is a value which shifts the average air-fuel ratio of the exhaust gas led to the rear catalyst to rich from the stoichiometric air-fuel ratio. This *DHOSR* is stored by a memory (ROM) as a single fixed value or as plural fixed values depending on the engine rotation speed and the load. Alternatively, *DHOSR* may be varied with the SOx discharge amount, in which case a value is stored in a memory (RAM).

[0246] Further, *DL1*, *DR1* are set to the values *DLL*, *DRL*, and *DL2*, *DR2* are set to the values *DLR*, *DRR*.

[0247] In S347, the value *PHOS* is set to *PHOSS*, and the value *DHOS* is set to *DHOSR*. Further, *DL1*, *DR1* are set to the values *DLR*, *DRR*, and *DL2*, *DR2* are set to the values *DLL*, *DRL*. In S349, *PHOS* is set to the value *PHOSS*, and *DHOS* is set to the value *DHOSS*. Herein, *DHOSS* is a value at which the average air-fuel ratio of the exhaust led to the rear catalyst becomes the stoichiometric air-fuel ratio. *DHOSS* is stored by a memory (ROM) as a single fixed value or as plural fixed values depending on the engine rotation speed and the load. It is also possible to have *DHOSS*=0.

[0248] Further, *DL1*, *DR1* are set to the values *DLL*, *DRL*, and *DL2*, *DR2* are set to the values *DLR*, *DRR*.

[0249] In S350, *PHOS* is set to the value *PHOSS*, and *DHOS* is set to the value *DHOSS*. Further, *DL1*, *DR1* are set to the values *DLR*, *DRR*, and *DL2* and *DR2* are set to the values *DLL*, *DRL*.

[0250] In S352, *PHOS* is set to the value *PHOSR*, and *DHOS* is set to the value *DHOSS*. Further, *DL1*, *DR1* are set to the value *DS*, and *DL2*, *DR2* are set to the value *DS*.

[0251] In S353, *DHOS* is set to the value *DHOSS* even if *PHOS* is set to the value *PHOSS*. Moreover, *DL1*, *DR1* are set to the value *DS*, and *DL2*, *DR2* are set to the value *DS*.

[0252] S354 relates to the control performed during normal running, and as dual O<sub>2</sub> sensor feedback control is performed by the first and second front O<sub>2</sub> sensors, a basic control constant of dual O<sub>2</sub> sensor feedback control is set as described earlier. That is, *PHOSPL*=*PHOSPLS*, *PHOSR*=*PHOSRS*, *PHOSIL*=*PHOSILS*, and *PHOSIR*=*PHOSIRS*. *DHOS* is then set to the value *DHOSS*. Further, *DL1*, *DR1* are set to the value *DS*, and *DL2*, *DR2* are set to the value *DS*.

[0253] Fig. 24 is a *DHOSR* setting routine (1), and it is performed at an interval of 10ms.

[0254] This is used when *DHOSR* in the aforementioned air-fuel ratio control value setting routine (3) is set to be variable in conjunction with the SOx discharge amount.

[0255] In S421, it is determined from the flag *Frich* whether or not the conditions hold for enriching the air-fuel ratio. When rich shift conditions hold, the value of *DHOSR* is computed by a function *f4* in S422.

[0256] In this case, the function *f4* is set so that the degree of rich shift has the following characteristics relative to each parameter. That is, the degree of rich shift becomes less the smaller the SOx discharge amount from the rear catalyst, and is 0 when the absorption amount is 0. Also, the degree of rich shift is less the lower the catalyst temperature, and is 0 at or below the SOx discharge temperature.

[0257] Therefore, according to this embodiment, rich shift of the air-fuel ratio is performed corresponding to the SOx discharge amount, and as the air-fuel ratio is not made rich unnecessarily, impairment of fuel-cost performance is avoided.

[0258] Next, a fourth embodiment will be described.

[0259] The fourth embodiment is different from the first-third embodiments only insofar as concerns the mode setting routine of the air-fuel ratio of the exhaust gas led to the first and second front catalysts, therefore the description will focus on this point

[0260] Fig. 25 is a mode setting routine (2), and it is performed at an interval of 10ms.

[0261] Here, a mode setting change-over is performed based on the elapsed time from when the conditions for increasing the temperature of the rear catalyst hold.

[0262] In this case, in a first setting mode where the average air-fuel ratio of the exhaust led to the first front catalyst is shifted to lean, and the air-fuel ratio of the exhaust led to the second front catalyst is shifted to rich,  $Fmode=1$ ; whereas in a second setting mode which applies the reverse settings,  $Fmode=0$ .

[0263] First, in a step S641, it is determined whether or not the conditions hold for discharging SOx absorbed by the rear catalyst, from whether or not  $Fsox=1$ .

[0264] In S642, it is determined whether or not the timing is immediately after when the conditions for discharging SOx absorbed by the rear catalyst have changed from not holding to holding.

[0265] If the timing is immediately after changing to holding, the routine proceeds to S643, wherein it is determined whether or not the conditions for increasing the temperature of the rear catalyst hold from the flag *Fheat*.

[0266] If temperature increase conditions hold, in S644, a counter *Theat* for measuring elapsed time from when the conditions for increasing temperature of the rear catalyst hold, is counted. Subsequently, in S645, it is determined whether or not the elapsed time *Theat* after the conditions for increasing the temperature of the rear catalyst hold, is larger than a predetermined time *Thth*.

[0267] When this elapsed time *Theat* is larger than the predetermined time *Thth*, the value of the present flag *Fmode* is determined in steps S646-S648, and *Fmode* is set to a different value from the present value.

[0268] After these mode settings are made or temperature increase condition has just held, the routine proceeds to S649, and the counter *Theat* is reset to 0.

[0269] In this case, by making the time for which the first and second front catalysts are exposed to lean exhaust, and the time for which they are exposed to rich exhaust, substantially the same for both catalysts, the deterioration rate of both front catalyst can be made almost the same.

[0270] Next, a fifth embodiment will be described. In this embodiment, the only difference from the first-fourth embodiments is the SOx discharge determining routine, so the discussion will focus on this part.

[0271] Fig. 26 is an SOx discharge condition determining routine (2), and it is performed at an interval of 10ms.

[0272] Here, the presence or absence of SOx deposition on the catalyst is determined based on the NOx concentration of the exhaust flowing from the rear catalyst, and a flag *Fsox* is set depending on whether conditions hold or do not hold for discharging SOx absorbed by the rear catalyst. In this case, when SOx discharge conditions hold, *Fsox* is set to 1, and when they do not hold, *Fsox* is set to 0.

[0273] First, in S521, the output of the NOx sensor is A/D converted to determine an NOx concentration signal *NOXS*, and the output of the catalyst temperature sensor is A/D converted to determine the catalyst temperature *Tcat*. Further, the engine rotation speed *N* is calculated based on the occurrence interval of a predetermined signal from the crank angle sensor, and the engine load *T* (for example, a target generated engine torque) depending on the accelerator depression amount) is calculated based on the output of the accelerator position sensor.

[0274] In S522, it is determined whether or not the air-fuel ratio is controlled to lean ( $TFBYA < 1$ ).

[0275] In S523, an amount  $\Delta NOX$  which is the amount of NOx absorbed by the rear catalyst in a predetermined time (here, 10ms), is computed.

[0276] Here,  $\Delta NOX = (\text{NOx amount flowing into rear catalyst in a predetermined time}) \times (\text{NOx absorption coefficient of rear catalyst})$ .

[0277] The NOx amount flowing into the rear catalyst in a predetermined time is computed as a parameter of for example engine rotation speed *N*, engine load *T* and average air-fuel ratio.

[0278] The NOx absorption rate of the rear catalyst (NOx amount absorbed in unit time/ NOx amount flowing into in unit time) is computed as a parameter of for example *NOXz* which is the present NOx absorption amount (estimated value of NOx absorption amount computed on immediately preceding occasion), catalyst temperature *Tcat*, and average air-fuel ratio. As the average air-fuel ratio, the target equivalent ratio *TFBYA* set by the target air-fuel ratio setting routine can be used.

[0279] The NOx absorption rate of the rear catalyst is a value from 0 to 1, and it has the following characteristics relative to various parameters. Specifically, the NOx absorption rate is larger the smaller the NOx absorption amount, and is a maximum when the NOx absorption amount is 0. The NOx absorption rate is a maximum when the rear catalyst is at a predetermined temperature, becomes smaller the lower the temperature is below the predetermined temperature, and is 0 when the temperature is at or below the catalyst activation temperature.

It also becomes smaller the higher the temperature is above a predetermined temperature. The NOx absorption rate becomes smaller the less the degree of leanness of the air-fuel ratio, and is 0 at an air-fuel ratio which is richer than



the stoichiometric air-fuel ratio.

[0280] In S524,  $\Delta NOX$  is added to  $NOXz$  which is the estimated NOx amount computed on the immediately preceding occasion so as to compute  $NOX$ , which is the most recent estimated NOx amount.

[0281] In S525, it is determined whether or not this estimated  $NOX$  is equal to or greater than a predetermined amount  $NOX_{th}$ . Here, the predetermined amount  $NOX_{th}$  is set to, or a value slightly less than, an NOx absorption permitted amount of the rear catalyst.

[0282] When the NOx amount reaches the predetermined amount, a flag  $F_{nox}$  which shows that the conditions hold for discharging NOx absorbed by the catalyst is set to 1 in S526.

[0283] Thus, if  $F_{nox}$  is 1, rich control of the air-fuel ratio is temporarily performed by a rich spike control routine which is independent of this routine and not shown, and NOx is discharged and reduced (however, this control is not directly concerned with SOx discharge which is the main subject of this invention).

[0284] In S527, it is determined whether or not the NOx concentration signal  $NOXS$  is equal to or greater than a permitted value  $NOXS_{th}$ .

[0285] As shown in Fig. 28, the NOx absorption rate of the rear catalyst (NOx amount which can be absorbed in unit time) decreases the more the total amount of NOx and SOx absorbed by the rear catalyst increases, and when the NOx absorption rate decreases, the NOx amount discharged downstream of the rear catalyst increases.

[0286] By setting the NOx concentration corresponding to the NOx amount flowing downstream of the catalyst when the maximum permitted amount of SOx and the predetermined amount  $NOX_{th}$  of NOx are absorbed by the catalyst, to a permitted value  $NOXS_{th}$ , it may be determined whether or not the SOx amount deposited is equal to or greater than a permitted amount.

[0287] If the SOx deposition amount reaches the maximum permitted amount, in S528, a counter  $Trich$  for measuring an elapsed time from when air-fuel ratio enrichment conditions hold is reset to 0.

[0288] In S529, the flag  $F_{sox}$  is set to 1. Due to this, the conditions for discharging SOx from the rear catalyst hold, i.e. SOx removal control is permitted.

[0289] On the other hand, if lean conditions do not hold in S522, the routine proceeds to S530, and  $NOX$  which is the estimated NOx absorption amount is set to 0. This is because, if the air-fuel ratio is controlled to the stoichiometric air-fuel ratio or rich, the NOx absorbed by the rear catalyst is rapidly discharged.

[0290] The flag  $F_{nox}$  is then set to 0 in S531.

[0291] Further, in S532, it is determined whether or not the conditions hold for enriching the air-fuel ratio. If rich shift conditions hold, the value of the counter  $Trich$  is counted in S533.

[0292] In S534, it is determined whether or not the elapsed time  $Trich$  after the conditions for enriching the air-fuel ratio hold, is longer than the predetermined time  $Tr_{th}$ . When rich shift of the air-fuel ratio is performed for longer than the predetermined time, it may be determined that SOx elimination from the rear catalyst is complete. Therefore, in S535, the flag  $F_{sox}$  is set to 0 and it is assumed that the SOx deposition amount on the rear catalyst lies within a permitted range.

[0293] In the above, to simplify the computation of  $NOX$ , S532 may for example be omitted, and  $\Delta NOX$  of S534 may be set to a fixed value.

[0294] Also, when the values of  $PHOSPLR$  and  $PHOSPRR$  are made variable, as described in the first embodiment, the computation of the estimated SOx amount is not performed according to this embodiment, so  $PHOSPLR$  and  $PHOSPRR$  are set according to the elapsed time from when conditions hold for enriching the air-fuel ratio.

[0295] Even when the values of  $PHOSR$ ,  $DHOSR$  are made variable, as shown in the second and third embodiments, the computation may be performed from when the conditions hold for enriching the air-fuel ratio.

[0296] Hence, from the above, the SOx deposition amount on the rear catalyst may be precisely determined by measuring the NOx concentration, and completion of SOx removal can be estimated from the enriching time.

[0297] Next, Fig. 27 is a  $PHOSPLR$ ,  $PHOSPRR$  setting routine (2), and it is performed at an interval of 10ms.

[0298] This is used when in case the SOx disposition amount is not computed,  $PHOSPLR$ ,  $PHOSPRR$  of the air-fuel ratio control value setting routine are set variably in conjunction with the SOx discharge amount.

[0299] First, in S431, it is determined whether or not the conditions hold for enriching the air-fuel ratio by determining whether or not the flag  $F_{rich}$  is 1. When these conditions hold, in S432, the values of  $PHOSPLR$ ,  $PHOSPRR$  are computed by parameters  $f5$ ,  $f6$ .

[0300] In this case,  $f5$ ,  $f6$  are determined so that the degree of rich shift has the following characteristics relative to various parameters. The degree of rich shift becomes smaller the longer the elapsed time  $Trich$  from when conditions hold for enriching the air-fuel ratio, and is 0 when  $Trich = T_{th}$ . Also, the degree of rich shift is smaller the lower the rear catalyst temperature, and is 0 at or below the SOx discharge temperature.

[0301] Therefore in this case, after discharge of SOx begins, enrichment of the air-fuel ratio decreases with elapsed time, air-fuel ratio control is performed corresponding to the SOx amount which actually remains, there is no unnecessary rich shift, and fuel-cost performance is improved.

[0302] Next, a sixth embodiment will be described. According to this sixth embodiment, the only difference from the

aforesaid first-fourth embodiments is the SOx discharge determining routine.

[0303] Fig. 29 is an SOx discharge condition determining routine (3), and it is performed at an interval of 10ms.

[0304] Here, by determining whether or not the engine has started, it is determined whether or not the conditions hold for discharging SOx absorbed by the rear catalyst and the flag *Fsox* is set to 1. When the conditions hold for discharging SOx absorbed by the rear catalyst, *Fsox* is set to 1, and when the conditions do not hold, *Fsox* is set to 0.

[0305] First, in S541, it is determined whether or not a starter switch has changed from ON to OFF, and when it has changed from ON to OFF, the counter *Trich* for measuring elapsed time from when the conditions hold for enriching the air-fuel ratio is reset to 0 in S542. In S543, the flag *Fsox* is set to 1.

[0306] In S544, it is determined whether or not the conditions hold for enriching the air-fuel ratio, and if so, the counter *Trich* is counted in S545.

[0307] In S546, it is determined whether or not the elapsed time *Trich* after the conditions hold for enriching the air-fuel ratio is longer than the predetermined time *Trth*. When enrichment was performed for a predetermined time due to this result, it is determined that SOx discharging from the catalyst is complete. In S547, the flag *Fsox* is set to 0.

[0308] Therefore, according to this embodiment, SOx removal control by enriching the air-fuel ratio is automatically performed only once after engine startup.

[0309] However, the method of this routine is performed regardless of the SOx amount absorbed by the rear catalyst, so the SOx amount when air-fuel ratio enrichment control starts is not fixed.

[0310] For this reason, if it is desired to perform rich shift efficiently, it is desirable to compute the estimated SOx amount, and set the above-mentioned *PHOHPLR*, *PHOHPLR* by the *PHOHPLR*, *PHOSPRR* setting routine (1), or set *PHOSR* by the *PHOSR* setting routine (1).

[0311] Although the invention has been described above by reference to certain embodiments of the invention, the invention is not limited to the embodiments described above. Modifications and variations of the embodiments described above will occur to those skilled in the art, in light of the above teaching.

[0312] The scope of the invention is defined with reference to the following claims.

## Claims

1. Exhaust purification device for an internal combustion engine, comprising:

a first front three-way catalyst (21) installed in a first exhaust passage (5a) connected to a first cylinder group, a second front three-way catalyst (22) installed in a second exhaust passage (5b) connected to a second cylinder group, a rear three-way catalyst (23) installed in an exhaust gas passage (5c) which combines the exhaust of said first and second exhaust passages (5a,5b), a first air-fuel ratio controller (11) for controlling the air-fuel ratio of the exhaust led to said first front three-way catalyst (21) to a predetermined air-fuel ratio, a second air-fuel ratio controller (11) for controlling the air-fuel ratio of the exhaust led to said second front three-way catalyst (22) to a predetermined air-fuel ratio, and a microprocessor programmed to:

determine the conditions under which the temperature of the rear three-way catalyst (23) should be increased, and

set the air-fuel ratio of the exhaust controlled by one of said air-fuel ratio controllers (11) to a richer air-fuel ratio than the stoichiometric air-fuel ratio, and set the air-fuel ratio of the exhaust controlled by the other of said air-fuel ratio controllers (11) to a leaner air-fuel ratio than the stoichiometric air-fuel ratio, when the conditions hold for increasing the temperature of said rear three-way catalyst (23),

a first air-fuel ratio sensor (31) installed in said first exhaust passage (5a), and a second air-fuel ratio sensor (32) installed in said second exhaust passage (5b), wherein

said first air-fuel ratio controller (11) computes a first feedback correction coefficient based on the output of said first air-fuel ratio sensor (31), corrects a fuel amount supplied to said first cylinder group using this first feedback correction coefficient, and thereby feedback controls the air-fuel ratio of exhaust led to said first front three-way catalyst (21), and

said second air-fuel ratio controller (11) computes a second feedback correction coefficient based on the output of said second air-fuel ratio sensor (32), corrects a fuel amount supplied to said second cylinder group using this second feedback correction coefficient, and thereby feedback controls the air-fuel ratio of exhaust led to said second front three-way catalyst (22).

2. Exhaust purification device according to claim 1, wherein said microprocessor is further programmed to set the air-fuel ratio of the exhaust controlled by said first and second air-fuel ratio controllers (11) so that the air-fuel ratio of the exhaust led to said rear three-way catalyst (23) is effectively the stoichiometric air-fuel ratio.

3. Exhaust purification device according to claim 1, wherein said microprocessor is further programmed to set the air-fuel ratios of the exhaust gases controlled by said first and second air-fuel ratio controllers (11) to effectively the stoichiometric air-fuel ratio when the conditions do not hold for increasing the temperature of said rear three-way catalyst (23).

4. Exhaust purification device according to at least one of claims 1 to 3, wherein said first and second sensors (31,32) are so designed that their outputs vary sharply around the stoichiometric air-fuel ratio relative to variation of the air-fuel ratio of the exhaust gas, said first air-fuel ratio controller (11) computes a first feedback correction coefficient by subtracting a first lean shift proportional part when the output of said first air-fuel ratio sensor (31) changes from lean to rich, and adding a first rich shift proportional part when it changes from rich to lean, said second air-fuel ratio controller (11) computes a second feedback correction coefficient by subtracting a second lean shift proportional part when the output of said second air-fuel ratio sensor (32) changes from lean to rich, and adding a second rich shift proportional part when it changes from rich to lean, and said microprocessor is further programmed to set a control midpoint value of the air-fuel ratio of exhaust gas controlled by said first and second air-fuel ratio controllers (11), to a predetermined air-fuel ratio by setting said first lean shift proportional part, said rich shift proportional part, said second lean shift proportional part and said second rich shift proportional part respectively to predetermined values.

5. Exhaust purification device according to at least one of claims 1 to 4, wherein said first and second sensors (31,32) are so designed that their outputs vary sharply around the stoichiometric air-fuel ratio relative to variation of the air-fuel ratio of the exhaust gas, said first air-fuel ratio controller (11) computes a first feedback correction coefficient by subtracting a first lean shift proportional part after a first lean shift delay time from when the output of said first air-fuel ratio sensor (31) changes from lean to rich, and adding a first rich shift proportional part after a first rich shift delay time from when it changes from rich to lean, said second air-fuel ratio controller (11) computes a second feedback correction coefficient by likewise subtracting a second lean shift proportional part after a second lean shift delay time from when the output of said second air-fuel ratio sensor (32) changes from lean to rich, and adding a second rich shift proportional part after a second rich shift delay time from when it changes from rich to lean, and said microprocessor is further programmed to set a control midpoint of the air-fuel ratio of the exhaust gas controlled by said first and second air-fuel ratio controllers (11), to a predetermined air-fuel ratio by setting said first lean shift delay time, said first rich shift delay time, said second lean shift delay time and said second rich shift delay time respectively to predetermined values.

6. Exhaust purification device according to claim 4 or 5, further comprising a rear air-fuel ratio sensor (33) installed in said exhaust passage (5c), and a rear air-fuel ratio controller (11) for correcting the setting of the air-fuel ratio by said microprocessor based on the output of said rear air-fuel ratio sensor (33), and controlling the air-fuel ratio of the exhaust led to said rear three-way catalyst (23) to a predetermined air-fuel ratio.

7. Exhaust purification device according to claim 1, wherein said microprocessor is further programmed to alternate between a first setting mode wherein the air-fuel ratio of the exhaust controlled by said first air-fuel ratio controller (11) is set leaner than the stoichiometric air-fuel ratio and the air-fuel ratio of the exhaust controlled by said second air-fuel ratio controller (11) is set richer than the stoichiometric air-fuel ratio, and a second setting mode wherein the air-fuel ratio of the exhaust controlled by said first air-fuel ratio controller (11) is set richer than the stoichiometric air-fuel ratio and the air-fuel ratio of the exhaust controlled by said second air-fuel ratio controller (11) is set leaner than the stoichiometric air-fuel ratio, when the conditions hold for increasing the temperature of the rear three-way catalyst (23).

8. Exhaust purification device according to claim 7, wherein said microprocessor is further programmed to alternate between said first setting mode and said second setting mode whenever a running time in one of these setting modes reaches a predetermined time.

9. Exhaust purification device according to at least one of claims 1 to 8, wherein said rear three-way catalyst (23) performs NOx absorption and discharge according to the air-fuel ratio of incoming exhaust gas.

10. Exhaust purification device according to claim 9, wherein said microprocessor is further programmed to determine

conditions under which SOx deposited on said rear three-way catalyst (23) should be discharged, and determine that the conditions hold for increasing the temperature of said rear three-way catalyst (23) when the conditions hold for discharging SOx which has been absorbed and deposited on said rear three-way catalyst (23).

- 5 11. Exhaust purification device according to claim 10, further comprising a startup detecting sensor for detecting startup of said internal combustion engine (11), wherein said microprocessor is further programmed to determine that the conditions hold for discharging SOx which has been absorbed and deposited on said rear three-way catalyst (23) when startup of said engine (1) is detected.
- 10 12. Exhaust purification device according to claim 10, wherein said microprocessor is further programmed to estimate an SOx amount which has been absorbed and deposited on said rear three-way catalyst (23), and determine conditions for discharging SOx deposited on said rear three-way catalyst (23) based on said estimated SOx deposit amount.
- 15 13. Exhaust purification device according to claim 12, wherein said microprocessor is further programmed to determine that the conditions hold for discharging SOx deposited on said rear three-way catalyst (23) when said estimated SOx deposition amount is equal to or greater than a first predetermined amount, and determine that SOx discharge conditions no longer hold when said estimated SOx deposition amount has fallen to or below a second predetermined amount less than said first predetermined amount.
- 20 14. Exhaust purification device according to claim 10, further comprising an NOx concentration sensor (36) for detecting the NOx concentration of the exhaust flowing from said rear three-way catalyst (23), and said microprocessor is further programmed to estimate an NOx amount absorbed on said rear three-way catalyst (23), and determine that conditions hold for discharging the SOx deposited on said rear three-way catalyst (23) based on said detected NOx concentration and said estimated NOx absorption amount.
- 25 15. Exhaust purification device according to claim 14, wherein said microprocessor is further programmed to determine that the conditions hold for discharging deposited SOx when the NOx concentration, detected at a time when the NOx amount absorbed on said rear three-way catalyst (23) is equal to or greater than a predetermined amount, is greater than a predetermined permitted value.
- 30 16. Exhaust purification device according to claim 10, further comprising a running condition detecting sensor for detecting running conditions, wherein said microprocessor is further programmed to determine that the conditions do not hold for increasing the temperature of said rear three-way catalyst (23) when the detected running conditions are outside a predetermined SOx discharge running region, regardless of whether or not the conditions hold for discharging SOx deposited on said rear three-way catalyst (23).
- 35 17. Exhaust purification device according to claim 10, further comprising a temperature measuring sensor (35) for detecting a temperature of said rear three-way catalyst (23), wherein said microprocessor is further programmed to determine that the conditions do not hold for increasing the temperature of said rear three-way catalyst (23) when the temperature of said three-way catalyst (23) exceeds a permitted temperature even when the temperature of said rear three-way catalyst (23) is equal to or greater than a predetermined SOx discharge temperature, regardless of whether or not the conditions hold for discharging SOx deposited on said rear three-way catalyst (23).
- 40 18. Exhaust purification device according to claim 10, further comprising a temperature measuring sensor for detecting a temperature of said rear three-way catalyst (23), wherein said microprocessor is further programmed to set the air-fuel ratios of the exhaust controlled by said first and second air-fuel ratio controllers (11) such that the air-fuel ratio of the exhaust led to said rear three-way catalyst (23) is richer than the stoichiometric air-fuel ratio when the conditions hold for discharging SOx deposited on said rear three-way catalyst (23), and the temperature of said rear three-way catalyst (23) is equal to or greater than an SOx discharge temperature.
- 45 19. Exhaust purification device according to claim 18, wherein said microprocessor is further programmed to set the degree of richness of the air-fuel ratio to be greater the larger the SOx amount deposited on said rear three-way catalyst (23).
- 50 20. Exhaust purification device according to claim 18, wherein said microprocessor is further programmed to set the degree of richness of the air-fuel ratio to be smaller the longer the elapsed time from when air-fuel ratio rich shift control starts.
- 55

21. Exhaust purification device according to at least one of claims 1 to 20, further comprising an ignition timing control device for applying a delay correction to an ignition timing which is preset according to running conditions when the conditions hold for increasing the temperature of said rear three-way catalyst (23).

22. Exhaust purification device according to at least one of claims 1 to 21, further comprising an exhaust valve opening timing control device for applying an advance correction to an opening timing of an exhaust valve which is preset according to running conditions when the conditions hold for increasing the temperature of said rear three-way catalyst (23).

23. Exhaust purification device according to at least one of claims 1 to 22, further comprising an exhaust gas recirculation control device for applying a reduction correction to an exhaust gas recirculation amount which is preset according to running conditions when the conditions hold for increasing the temperature of said rear three-way catalyst (23).

24. Exhaust purification device for an internal combustion engine, comprising:

a first front three-way catalyst (21) installed in a first exhaust passage (5a) connected to a first cylinder group, a second front three-way catalyst (22) installed in a second exhaust passage (5b) connected to a second cylinder group,

a rear three-way catalyst (23) installed in an exhaust gas passage (5c) which combines the exhaust of the first and second exhaust passage (5a, 5b),

a first air-fuel ratio controller (11) for controlling the air-fuel ratio of the exhaust led to the first front three-way catalyst (21) to a predetermined air-fuel ratio,

a second air-fuel ratio controller (11) for controlling the air-fuel ratio of the exhaust led to the second front three-way catalyst (22) to a predetermined air-fuel ratio, and

a microprocessor programmed to:

determine the conditions under which the SOx deposited on the rear three-way catalyst (23) should be discharged,

set the air-fuel ratio of the exhaust controlled by one of the air-fuel ratio controllers (11) to a richer air-fuel ratio than the stoichiometric air-fuel ratio, and set the air-fuel ratio of the exhaust controlled by other of the air-fuel ratio controllers (11) to a leaner air-fuel ratio than the stoichiometric air-fuel ratio, when the SOx deposited on the rear three-way catalyst (23) should be discharged, wherein the air-fuel ratio of the exhaust which flows into the rear three-way catalyst (23), is controlled to be a richer air-fuel ratio than the stoichiometric air-fuel ratio, when the SOx deposited on the rear three-way catalyst (23) should be released, thereby feedback controlling the air-fuel ratio of the exhaust led to the rear three-way catalyst (23) based on an output of an air-fuel ratio sensor.

#### Patentansprüche

1. Abgasreinigungsanlage für eine Brennkraftmaschine, umfassend:

einen ersten vorderen Dreiwegekatalysator (21), installiert in einem ersten Abgasdurchlass (5a), angeschlossen an eine erste Zylindergruppe,

einen zweiten vorderen Dreiwegekatalysator (22), installiert in einem zweiten Abgasdurchlass (5b), angeschlossen an eine zweite Zylindergruppe,

einen hinteren Dreiwegekatalysator (23), installiert in einem Abgasdurchlass (5c), der die Abgase des ersten und zweiten Abgasdurchlasses (5a, 5b) vereinigt,

eine erste Luft-Brennstoff-Verhältnissteuerung (11) zum Steuern des Luft-Brennstoff-Verhältnisses des dem ersten vorderen Dreiwegekatalysator (21) zugeleiteten Abgases in einem vorgegebenen Luft-Brennstoff-Verhältnis,

eine zweite Luft-Brennstoff-Verhältnissteuerung (11) zur Steuerung des Luft-Brennstoff-Verhältnisses des dem zweiten vorderen Dreiwegekatalysator (21) zugeleiteten Abgases in einem vorgegebenen Luft-Brennstoff-

Verhältnis und

einen Mikroprozessor, programmiert,

5 die Bedingungen zu bestimmen, unter denen die Temperatur des hinteren Dreiwegekatalysators (23) erhöht werden soll und

das durch eine der Luft-Brennstoff-Verhältnissteuerungen (11) gesteuerte Luft-Brennstoff-Verhältnis in einem fetteren Luft-Brennstoff-Verhältnis als das stöchiometrische Luft-Brennstoff-Verhältnis einzustellen und das  
10 von der anderen der Luft-Brennstoff-Verhältnissteuerungen (11) gesteuerte Luft-Brennstoff-Verhältnis in einem mageren Luft-Brennstoff-Verhältnis als das stöchiometrische Luft-Brennstoff-Verhältnis einzustellen, wenn die Bedingungen für das Erhöhen der Temperatur des hinteren Dreiwegekatalysators (23) gelten,

einen ersten Luft-Brennstoff-Verhältnissensor (31), installiert in dem ersten Abgasdurchlass (5a) und einen  
15 zweiten Luft-Brennstoff-Verhältnissensor (32), installiert in dem zweiten Abgasdurchlass (5b), wobei

die erste Luft-Brennstoff-Verhältnissteuerung (11) einen ersten, auf der Ausgabe des ersten Luft-Brennstoff-Verhältnissensors (31) basierenden Feedback-Korrekturkoeffizienten berechnet, unter Verwendung dieses Feedback-Korrekturkoeffizienten, die der ersten Zylindergruppe gelieferte Brennstoffmenge korrigiert und da-  
20 durch das dem ersten vorderen Dreiwegekatalysator (21) zugeleitete Luft-Brennstoff-Verhältnis feedback-steuert und

die zweite Luft-Brennstoff-Verhältnissteuerung (11) einen zweiten, auf der Ausgabe des zweiten Luft-Brennstoff-Verhältnissensors (32) basierenden Feedback-Korrekturkoeffizienten berechnet, unter Verwendung die-  
25 ses Feedback-Korrekturkoeffizienten die der zweiten Zylindergruppe gelieferte Brennstoffmenge korrigiert und dadurch das dem zweiten vorderen Dreiwegekatalysator (22) zugeleitete Luft-Brennstoff-Verhältnis feedback-steuert.

2. Abgasreinigungsanlage nach Anspruch 1, wobei der Mikroprozessor weiterhin programmiert ist, das durch die erste und die zweite Luft-Brennstoff-Verhältnissteuerung (11) gesteuerte Luft-Brennstoff-Verhältnis des Abgases  
30 derartig einzustellen, dass das Luft-Brennstoff-Verhältnis des dem hinteren Dreiwegekatalysator (23) zugeführten Abgases tatsächlich das stöchiometrische Luft-Brennstoff-Verhältnis ist.

3. Abgasreinigungsanlage nach Anspruch 1, wobei der Mikroprozessor weiterhin programmiert ist, die durch die erste und zweite Luft-Brennstoff-Verhältnissteuerung (11) gesteuerten Luft-Brennstoff-Verhältnisse der Abgase  
35 tatsächlich auf das stöchiometrische Luft-Brennstoff-Verhältnis einzustellen, wenn die Bedingungen für das Erhöhen der Temperatur des hinteren Dreiwegekatalysators (23) nicht gelten.

4. Abgasreinigungsanlage nach wenigstens einem der Ansprüche 1 bis 3, wobei die genannten ersten und zweiten Sensoren (31, 32) derartig eingerichtet sind, dass ihre Ausgaben sehr nahe an dem stöchiometrischen Luft-Brennstoff-Verhältnis relativ zu der Veränderung des Luft-Brennstoff-Verhältnisses des Abgases variieren; die erste Luft-  
40 Brennstoff-Verhältnissteuerung (11) durch Subtrahieren eines ersten proportionalen Magerwechselanteils, wenn die Ausgabe des ersten Luft-Brennstoff-Verhältnissensors (31) von mager zu fett wechselt und Hinzufügen eines ersten proportionalen Fettwechselanteils, wenn sie von fett zu mager wechselt, einen ersten Feedback-Korrekturkoeffizienten berechnet,  
45 die zweite Luft-Brennstoff-Verhältnissteuerung (11) durch Subtrahieren eines zweiten proportionalen Magerwechselanteils, wenn die Ausgabe des zweiten Luft-Brennstoff-Verhältnissensors (32) von mager zu fett wechselt und Hinzufügen eines proportionalen Fettwechselanteils, wenn sie von fett zu mager wechselt, einen zweiten Feedback-Korrekturkoeffizienten berechnet und  
50 der Mikroprozessor weiterhin programmiert ist, durch Einstellen des ersten proportionalen Magerwechselanteils, des ersten proportionalen Fettwechselanteils, des zweiten proportionalen Magerwechselanteils und des zweiten proportionalen Fettwechselanteils auf jeweils vorgegebene Werte einen Kontrollmittelwert des durch die erste und die zweite Luft-Brennstoff-Verhältnissteuerung (11) gesteuerten Luft-Brennstoff-Verhältnisses des Abgases auf ein vorgegebenes Luft-Brennstoff-Verhältnis einzustellen.

5. Abgasreinigungsanlage nach wenigstens einem der Ansprüche 1 bis 4, wobei die genannten ersten und zweiten Sensoren (31, 32) derartig eingerichtet sind, dass ihre Ausgaben sehr nahe an dem stöchiometrischen Luft-Brennstoff-Verhältnis relativ zu der Veränderung des Luft-Brennstoff-Verhältnisses des Abgases variieren, die erste Luft-  
55 Brennstoff-Verhältnissteuerung (11) durch Subtrahieren eines ersten proportionalen Magerwechselanteils nach

einer ersten Magerwechselverzögerungszeit, von der an die Ausgabe des ersten Luft-Brennstoff-Verhältnissensors (31) von mager zu fett wechselt und Hinzufügen eines ersten proportionalen Fettwechselanteils nach einer ersten Fettwechselverzögerungszeit, von der an sie von fett zu mager wechselt, einen ersten Feedback-Korrekturkoeffizienten berechnet, die zweite Luft-Brennstoff-Verhältnissteuerung (11) durch gleichermaßen Subtrahieren eines zweiten proportionalen Magerwechselanteils nach einer zweiten Magerwechselverzögerungszeit, von der an die Ausgabe des zweiten Luft-Brennstoff-Verhältnissensors (32) von mager zu fett wechselt und Hinzufügen eines zweiten proportionalen Fettwechselanteils nach einer zweiten Fettwechselverzögerungszeit, von der an sie von fett zu mager wechselt, einen zweiten Feedback-Korrekturkoeffizienten berechnet und der Mikroprozessor weiterhin programmiert ist, durch Einstellen der ersten Magerwechselverzögerungszeit, der ersten Fettwechselverzögerungszeit und der zweiten Magerwechselverzögerungszeit und der zweiten Fettwechselverzögerungszeit auf jeweils vorgegebene Werte einen Kontrollmittelwert des durch die erste und zweite Luft-Brennstoff-Verhältnissteuerung (11) gesteuerten Luft-Brennstoff-Verhältnis des Abgases auf ein vorgegebenes Luft-Brennstoff-Verhältnis einzustellen.

6. Abgasreinigungsanlage nach Anspruch 4 oder 5, weiterhin umfassend einen hinteren Luft-Brennstoff-Verhältnissensor (33), installiert in dem Abgasdurchlass (5c) und eine hinteren Luft-Brennstoff-Verhältnissteuerung (11) zum Korrigieren der Einstellung des Luft-Brennstoff-Verhältnisses durch den Mikroprozessor, basierend auf der Ausgabe des Luft-Brennstoff-Verhältnissensors (33) und zum Steuern des Luft-Brennstoff-Verhältnisses des dem hinteren Dreiwegekatalysator zugeführten Abgases in einem vorgegebenen Luft-Brennstoff-Verhältnis.
7. Abgasreinigungsanlage nach Anspruch 1, wobei der Mikroprozessor weiterhin programmiert ist, zwischen einem ersten Einstellungsmodus, in dem das durch die erste Luft-Brennstoff-Verhältnissteuerung (11) gesteuerte Luft-Brennstoff-Verhältnis des Abgases magerer als das stöchiometrische Luft-Brennstoff-Verhältnis eingestellt ist und das durch die zweite Luft-Brennstoff-Verhältnissteuerung (11) gesteuerte Luft-Brennstoff-Verhältnis des Abgases fetter als das stöchiometrische Luft-Brennstoff-Verhältnis eingestellt ist und einem zweiten Einstellungsmodus, in dem das durch die erste Luft-Brennstoff-Verhältnissteuerung (11) gesteuerte Luft-Brennstoff-Verhältnis des Abgases fetter als das stöchiometrische Luft-Brennstoff-Verhältnis eingestellt ist und das durch die zweite Luft-Brennstoff-Verhältnissteuerung (11) gesteuerte Luft-Brennstoff-Verhältnis des Abgases magerer als das stöchiometrische Luft-Brennstoff-Verhältnis eingestellt ist, zu alternieren, wenn die Bedingungen zum Erhöhen der Temperatur des hinteren Dreiwegekatalysators (23) gelten.
8. Abgasreinigungsanlage nach Anspruch 7, wobei der Mikroprozessor weiterhin programmiert ist immer dann zwischen dem ersten Einstellungsmodus und dem zweiten Einstellungsmodus zu alternieren, wenn eine Betriebszeit in einem dieser Einstellungsmodi eine vorgegebene Zeit erreicht.
9. Abgasreinigungsanlage nach einem der Ansprüche 1 bis 8, wobei der hintere Dreiwegekatalysator (23) die NOx-Absorption und NOx-Entladung entsprechend dem Luft-Brennstoff-Verhältnis des eingeleiteten Abgases durchführt.
10. Abgasreinigungsanlage nach Anspruch 9, wobei der Mikroprozessor weiterhin programmiert ist, Bedingungen zu bestimmen, unter denen auf dem hinteren Dreiwegekatalysator (23) abgesetztes SOx entladen werden soll und zu bestimmen, dass die Bedingungen für die Erhöhung der Temperatur des hinteren Dreiwegekatalysators (23) gelten, wenn die Bedingungen für die Entladung von SOx, das absorbiert und auf dem hinteren Dreiwegekatalysator (23) abgesetzt wurde, gelten.
11. Abgasreinigungsanlage nach Anspruch 10, weiterhin umfassend einen Starterfassungssensor, zum Erfassen des Starts der Brennkraftmaschine (1), wobei der Mikroprozessor weiterhin programmiert ist, zu bestimmen, dass die Bedingungen für die Entladung von SOx, das absorbiert und auf dem hinteren Dreiwegekatalysator (23) abgesetzt wurde, gelten, wenn der Start der genannten Maschine (1) erfasst wurde.
12. Abgasreinigungsanlage nach Anspruch 10, wobei der Mikroprozessor weiterhin programmiert ist, um eine SOx-Menge, die absorbiert und auf dem hinteren Dreiwegekatalysator (23) abgesetzt wurde, zu beurteilen und Bedingungen für die Entladung des auf dem hinteren Dreiwegekatalysator (23) abgesetzten SOx, basierend auf der beurteilten abgesetzten SOx-Menge, zu bestimmen.
13. Abgasreinigungsanlage nach Anspruch 12, wobei der Mikroprozessor weiterhin programmiert ist, zu bestimmen, dass die Bedingungen für das Entladen des auf dem hinteren Dreiwegekatalysator (23) abgesetzten SOx gelten, wenn die beurteilte abgesetzte SOx-Menge gleich groß oder größer als eine erste vorgegebene Menge ist und zu

bestimmen, dass die Bedingungen für das Entladen des auf dem hinteren Dreiwegekatalysator (23) abgesetzten SOx nicht länger gelten, wenn die beurteilte abgesetzte SOx-Menge unter eine zweite vorgegebene Menge, kleiner als die erste vorgegebene Menge, gesunken ist.

- 5 14. Abgasreinigungsanlage nach Anspruch 10, weiterhin umfassend einen NOx-Konzentrationssensor (36) zum Erfassen der NOx-Konzentration des von dem hinteren Dreiwegekatalysator (23) strömenden Abgases und der Mikroprozessor weiterhin programmiert ist, eine auf dem hinteren Dreiwegekatalysator (23) absorbierte NOx-Menge zu beurteilen und zu bestimmen, dass die Bedingungen für das Entladen des auf dem hinteren Dreiwegekatalysator (23) abgesetzten SOx, basierend auf der erfassten NOx-Konzentration und der beurteilten NOx-Absorptionsmenge, gelten.  
10
15. Abgasreinigungsanlage nach Anspruch 14, wobei der Mikroprozessor weiterhin programmiert ist, zu bestimmen, dass die Bedingungen zur Entladung des abgesetzten SOx gelten, wenn die NOx-Menge, erfasst zu einem Zeitpunkt, zu dem die an dem hinteren Dreiwegekatalysator (23) absorbierte NOx-Menge gleich groß oder größer als eine vorgegebene Menge ist, größer als ein vorgegebener erlaubter Wert ist.  
15
16. Abgasreinigungsanlage nach Anspruch 10, weiterhin umfassend einen Sensor zum Erfassen der Betriebsbedingungen, wobei der Mikroprozessor weiterhin programmiert ist, zu bestimmen, dass die Bedingungen für die Erhöhung der Temperatur des hinteren Dreiwegekatalysators (23), wenn die erfassten Betriebsbedingungen außerhalb eines vorgegebenen SOx-Entladungsbetriebsbereichs sind, unabhängig davon, ob die Bedingungen für das Entladen des auf dem hinteren Dreiwegekatalysators (23) abgesetzten SOx gelten oder nicht, nicht gelten.  
20
17. Abgasreinigungsanlage nach Anspruch 10, weiterhin umfassend einen Temperaturmessfühler (35) zum Erfassen einer Temperatur des hinteren Dreiwegekatalysators (23), wobei der Mikroprozessor weiterhin programmiert ist, zu bestimmen, dass die Bedingungen für die Erhöhung der Temperatur des hinteren Dreiwegekatalysators (23), wenn die Temperatur des hinteren Dreiwegekatalysators (23) eine erlaubte Temperatur übersteigt, selbst wenn die Temperatur des hinteren Dreiwegekatalysators (23) gleich groß wie eine vorgegebene SOx-Entladungstemperatur oder größer als eine vorgegebene SOx-Entladungstemperatur ist, unabhängig davon, ob die Bedingungen für das Entladen des auf dem hinteren Dreiwegekatalysators (23) abgesetzten SOx gelten oder nicht, nicht gelten.  
25  
30
18. Abgasreinigungsanlage nach Anspruch 10, weiterhin umfassend einen Temperaturmessfühler (35) zum Erfassen einer Temperatur des hinteren Dreiwegekatalysators (23), wobei der Mikroprozessor weiterhin programmiert ist, die durch die erste und die zweite Luft-Brennstoff-Verhältnissteuerung (11) gesteuerten Luft-Brennstoff-Verhältnisse der Abgase derartig einzustellen, dass das Luft-Brennstoff-Verhältnis des dem hinteren Dreiwegekatalysator (23) zugeführten Abgases fetter ist als das stöchiometrische Luft-Brennstoff-Verhältnis, wenn die Bedingungen für das Entladen des auf dem hinteren Dreiwegekatalysator (23) abgesetzten SOx gelten und die Temperatur des hinteren Dreiwegekatalysators (23) gleich der SOx-Entladungstemperatur oder größer als die SOx-Entladungstemperatur ist.  
35
19. Abgasreinigungsanlage nach Anspruch 18, wobei der Mikroprozessor weiterhin programmiert ist, den Fettgrad des Luft-Brennstoff-Verhältnis umso größer einzustellen, je größer die auf dem hinteren Dreiwegekatalysators (23) abgesetzten SOx-Menge ist.  
40
20. Abgasreinigungsanlage nach Anspruch 18, wobei der Mikroprozessor weiterhin programmiert ist, den Fettgrad des Luft-Brennstoff-Verhältnis umso kleiner einzustellen, je so größer die Gesamtzeit ist, von der an die Luft-Brennstoff-Verhältnis-Fettwechselsteuerung beginnt.  
45
21. Abgasreinigungsanlage nach wenigstens einem der Ansprüche 1 bis 20, weiterhin umfassend eine Zündzeitpunkt-Steuerungseinrichtung, zum Anwenden einer Verzögerungskorrektur auf einen Zündzeitpunkt, der entsprechend den Betriebsbedingungen voreingestellt ist, wenn die Bedingungen für das Erhöhen der Temperatur des hinteren Dreiwegekatalysators (23) gelten.  
50
22. Abgasreinigungsanlage nach wenigstens einem der Ansprüche 1 bis 21, weiterhin umfassend eine Auslassventilöffnungszeitpunkt-Steuerungseinrichtung zum Anwenden einer Vorkorrektur auf einen Öffnungszeitpunkt eines Auslassventils, das entsprechend den Betriebsbedingungen voreingestellt ist, wenn die Bedingungen für das Erhöhen der Temperatur des hinteren Dreiwegekatalysators (23) gelten.  
55
23. Abgasreinigungsanlage nach wenigstens einem der Ansprüche 1 bis 22, weiterhin umfassend eine Abgasrück-



führungsteuerungseinrichtung zum Anwenden einer Reduzierungskorrektur auf eine Abgasrückführungsmenge, die entsprechend den Betriebsbedingungen voreingestellt ist, wenn die Bedingungen für das Erhöhen der Temperatur des hinteren Dreiwegekatalysators (23) gelten.

24. Abgasreinigungsanlage für eine Brennkraftmaschine, umfassend:

einen ersten vorderen Dreiwegekatalysator (21), installiert in einem ersten Abgasdurchlass (5a), angeschlossen an eine erste Zylindergruppe,

einen zweiten vorderen Dreiwegekatalysator (22), installiert in einem zweiten Abgasdurchlass (5b), angeschlossen an eine zweite Zylindergruppe,

einen hinteren Dreiwegekatalysator (23), installiert in einem Abgasdurchlass (5c) der die Abgase des ersten und zweiten Abgasdurchlasses (5a, 5b) vereinigt,

eine erste Luft-Brennstoff-Verhältnissteuerung (11) zum Steuern des Luft-Brennstoff-Verhältnisses des dem ersten vorderen Dreiwegekatalysator (21) zugeleiteten Abgases in einem vorgegebenen Luft-Brennstoff-Verhältnis,

eine zweite Luft-Brennstoff-Verhältnissteuerung (11) zum Steuern des Luft-Brennstoff-Verhältnisses des dem zweiten vorderen Dreiwegekatalysator (21) zugeleiteten Abgases in einem vorgegebenen Luft-Brennstoff-Verhältnis und

einen Mikroprozessor, programmiert,

die Bedingungen zu bestimmen, unter denen das auf dem hinteren Dreiwegekatalysator (23) abgesetzte SOx entladen werden soll,

das durch eine der Luft-Brennstoff-Verhältnissteuerungen (11) gesteuerte Luft-Brennstoff-Verhältnis des Abgases auf ein fetteres Luft-Brennstoff-Verhältnis als das stöchiometrische Luft-Brennstoff-Verhältnis einzustellen und das von der anderen der Luft-Brennstoff-Verhältnissteuerungen (11) gesteuerte Luft-Brennstoff-Verhältnis des Abgases auf ein magereres Luft-Brennstoff-Verhältnis als das stöchiometrische Luft-Brennstoff-Verhältnis einzustellen, wenn das auf dem hinteren Dreiwegekatalysator (23) abgesetzte SOx entladen werden soll, wobei das Luft-Brennstoff-Verhältnis des Abgases, das in den hinteren Dreiwegekatalysator (23) strömt, gesteuert wird, ein fetteres Luft-Brennstoff-Verhältnis zu sein als das stöchiometrische Luft-Brennstoff-Verhältnis, wenn das auf dem hinteren Dreiwegekatalysator (23) abgesetzte SOx abgegeben werden soll, wodurch das Luft-Brennstoff-Verhältnis des dem hinteren Dreiwegekatalysator (23) zugeführten Abgases, basierend auf der Ausgabe eines Luft-Brennstoff-Verhältnissensors, feedback-gesteuert wird.

Revendications

1. Dispositif de purification des gaz d'échappement pour un moteur à combustion interne, comprenant :

un premier catalyseur avant à trois voies (21) installé dans un premier passage d'échappement (5a) relié à un premier groupe de cylindres,

un deuxième catalyseur avant à trois voies (22) installé dans un deuxième passage d'échappement (5b) relié à un deuxième groupe de cylindres,

un catalyseur arrière à trois voies (23) installé dans un passage de gaz d'échappement (5c) qui combine l'échappement desdits premier et deuxième passages d'échappement (5a, 5b),

un premier dispositif de commande du rapport air-combustible (11) pour commander le rapport air-combustible des gaz d'échappement amenés audit premier catalyseur avant à trois voies (21) à un rapport air-combustible prédéterminé,

un deuxième dispositif de commande du rapport air-combustible (11) pour commander le rapport air-combus-

tibles des gaz d'échappement amenés audit deuxième catalyseur avant à trois voies (22) à un rapport air-combustible prédéterminé et,

un microprocesseur programmé pour :

déterminer les conditions sous lesquelles la température du catalyseur arrière à trois voies (23) devrait être augmentée et

établir le rapport air-combustible des gaz d'échappement commandés par l'un desdits dispositifs de commande (11) du rapport air-combustible à un rapport air-combustible plus riche que le rapport air-combustible stoechiométrique, et établir le rapport air-combustible des gaz d'échappement commandés par l'autre desdits dispositifs de commande (11) du rapport air-combustible à un rapport air-combustible plus pauvre que le rapport air-combustible stoechiométrique lorsque les conditions pour augmenter la température dudit catalyseur arrière à trois voies (23) se maintiennent,

un premier capteur du rapport air-combustible (31) installé dans ledit premier passage d'échappement (5a), et un deuxième capteur du rapport air-combustible (32) installé dans ledit deuxième passage d'échappement (5b), où

ledit premier dispositif de commande (11) du rapport air-combustible calcule un premier coefficient de correction de réinjection sur la base de la sortie dudit premier capteur (31) du rapport air-combustible, corrige une quantité de combustible fournie audit premier groupe de cylindres en utilisant ce premier coefficient de correction de réinjection et commande ainsi par réinjection le rapport air-combustible des gaz d'échappement amenés audit premier catalyseur avant à trois voies (21), et

ledit deuxième dispositif de commande (11) du rapport air-combustible calcule un deuxième coefficient de correction de réinjection sur la base de la sortie dudit deuxième capteur (32) du rapport air-combustible, corrige une quantité de combustible fournie audit deuxième groupe de cylindres en utilisant ce deuxième coefficient de correction de réinjection et commande ainsi par réinjection le rapport air-combustible des gaz d'échappement amenés audit deuxième catalyseur avant à trois voies (22).

2. Dispositif de purification de gaz d'échappement selon la revendication 1, où ledit microprocesseur est programmé en outre pour établir le rapport air-combustible des gaz d'échappement commandé par lesdits premier et deuxième dispositifs de commande (11) du rapport air-combustible de façon que le rapport air-combustible des gaz d'échappement amenés audit catalyseur arrière à trois voies (23) soit effectivement le rapport air-combustible stoechiométrique.
3. Dispositif de purification de gaz d'échappement selon la revendication 1, où ledit microprocesseur est programmé en outre pour régler les rapports air-combustible des gaz d'échappement commandés par lesdits premier et deuxième dispositifs de commande (11) du rapport air-combustible pour qu'ils représentent effectivement le rapport air-combustible stoechiométrique lorsque les conditions ne sont pas réunies pour augmenter la température dudit catalyseur arrière à trois voies (23).
4. Dispositif de purification de gaz d'échappement selon au moins l'une des revendications 1 à 3, où lesdits premier et deuxième capteurs (31, 32) sont conçus de façon que leurs sorties varient fortement autour du rapport air-combustible stoechiométrique relativement à une variation du rapport air-combustible des gaz d'échappement, ledit premier dispositif de commande (11) du rapport air-combustible calcule un premier coefficient de correction à réinjection en déduisant une première partie proportionnelle de changement pauvre lorsque la sortie dudit premier capteur de rapport air-combustible (31) change de pauvre à riche et en ajoutant une première partie proportionnelle de changement riche lorsqu'il change de riche à pauvre, ledit deuxième dispositif de commande (11) du rapport air-combustible calcule un deuxième coefficient de correction à réinjection en déduisant une deuxième partie proportionnelle de changement pauvre lorsque la sortie dudit deuxième capteur du rapport air-combustible (32) change de pauvre à riche, et ajoute une deuxième partie proportionnelle de changement riche lorsqu'il change de riche à pauvre et ledit microprocesseur est en outre programmé pour régler une valeur de point médian de commande dudit rapport air-combustible des gaz d'échappement commandés par lesdits premier et deuxième dispositifs de commande (11) du rapport air-combustible à un rapport air-combustible prédéterminé en établissant ladite première partie proportionnelle de changement pauvre, ladite partie proportionnelle de changement riche, ladite deuxième partie

proportionnelle de changement pauvre et ladite deuxième partie proportionnelle de changement riche respectivement à des valeurs prédéterminées.

5. Dispositif de purification de gaz d'échappement selon au moins l'une des revendications 1 à 4, où lesdits premier et deuxième capteurs (31, 32) sont conçus de façon que leurs sorties varient fortement autour du rapport air-combustible stoechiométrique relativement à une variation du rapport air-combustible des gaz d'échappement, ledit premier dispositif de commande (11) du rapport air-combustible calcule un premier coefficient de correction à réinjection en déduisant une première partie proportionnelle de changement pauvre après un premier temps de retard de changement pauvre à partir duquel la sortie dudit premier capteur de rapport air-combustible (31) change de pauvre à riche, et ajoute une première partie proportionnelle de changement riche après un premier temps de retard de changement riche à partir duquel il change de riche à pauvre, ledit deuxième dispositif de commande de rapport air-combustible (11) calcule un deuxième coefficient de correction à réinjection en déduisant d'une manière similaire une deuxième partie proportionnelle de changement pauvre après un deuxième temps de retard de changement pauvre à partir duquel la sortie dudit capteur de rapport air-combustible (32) change de pauvre à riche, et ajoute une deuxième partie proportionnelle de changement riche après un deuxième temps de retard de changement riche à partir duquel il change de riche à pauvre, et ledit microprocesseur est programmé en outre pour régler un point médian de commande du rapport air-combustible des gaz d'échappement commandé par lesdits premier et deuxième dispositifs de commande de rapport air-combustible (11) à un rapport air-combustible prédéterminé en réglant ledit premier temps de retard de changement pauvre, ledit premier temps de retard de changement riche, ledit deuxième temps de retard de changement pauvre et ledit deuxième temps de retard de changement riche, respectivement, à des valeurs prédéterminées.
6. Dispositif de purification de gaz d'échappement selon la revendication 4 ou 5, comprenant en outre un capteur de rapport air-combustible arrière (33) installé dans ledit passage d'échappement (5c), et un dispositif de commande arrière (11) du rapport air-combustible pour corriger le réglage du rapport air-combustible par ledit microprocesseur sur la base de la sortie dudit capteur arrière (33) du rapport air-combustible et pour commander le rapport air-combustible des gaz d'échappement amenés audit catalyseur arrière à trois voies (23) à un rapport air-combustible prédéterminé.
7. Dispositif de purification de gaz d'échappement selon la revendication 1, où ledit microprocesseur est programmé en outre pour alterner entre un premier mode de réglage où le rapport air-combustible des gaz d'échappement commandé par ledit premier dispositif de commande (11) du rapport air-combustible est réglé pour être plus pauvre que le rapport air-combustible stoechiométrique, et le rapport air-combustible des gaz d'échappement commandé par ledit deuxième dispositif de commande (11) du rapport air-combustible est réglé pour être plus riche que le rapport air-combustible stoechiométrique, et un deuxième mode de réglage où le rapport air-combustible des gaz d'échappement commandé par ledit premier dispositif de commande (11) du rapport air-combustible est réglé pour être plus riche que le rapport air-combustible stoechiométrique et le rapport air-combustible des gaz d'échappement commandé par ledit deuxième dispositif de commande (11) du rapport air-combustible est réglé pour être plus pauvre que le rapport air-combustible stoechiométrique, lorsque les conditions sont maintenues pour augmenter la température du catalyseur arrière à trois voies (23).
8. Dispositif de purification de gaz d'échappement selon la revendication 7, où ledit microprocesseur est programmé en outre pour alterner entre ledit premier mode de réglage et ledit deuxième mode de réglage à chaque fois qu'un temps d'écoulement dans un de ces modes réglés atteint un temps prédéterminé.
9. Dispositif de purification de gaz d'échappement selon au moins l'une des revendications 1 à 8, où ledit catalyseur arrière à trois voies (23) exécute une absorption et évacuation des NOx selon le rapport air-combustible des gaz d'échappement entrant dans celui-ci.
10. Dispositif de purification de gaz d'échappement selon la revendication 9, où ledit microprocesseur est programmé en outre pour déterminer les conditions sous lesquelles du SOx déposé sur ledit catalyseur arrière à trois voies (23) devrait être évacué, et pour déterminer que les conditions sont maintenues pour augmenter la température dudit catalyseur arrière à trois voies (23) lorsque les conditions sont maintenues pour évacuer du SOx qui a été absorbé et déposé sur ledit catalyseur arrière à trois voies (23).
11. Dispositif de purification de gaz d'échappement selon la revendication 10, comprenant en outre un capteur de détection de démarrage pour détecter le démarrage dudit moteur à combustion interne (11), où ledit microprocesseur est programmé en outre pour déterminer que les conditions sont maintenues pour l'évacuation du SOx qui

a été absorbé et déposé sur ledit catalyseur arrière à trois voies (23) lorsque le démarrage dudit moteur (1) est détecté.

5 12. Dispositif de purification de gaz d'échappement selon la revendication 10, où ledit microprocesseur est programmé en outre pour estimer une quantité SOx qui a été absorbée et déposée sur ledit catalyseur arrière à trois voies (23) et pour déterminer les conditions pour évacuer du SOx déposé sur ledit catalyseur arrière à trois voies (23) sur la base de ladite quantité estimée du dépôt SOx.

10 13. Dispositif de purification de gaz d'échappement selon la revendication 12, où ledit microprocesseur est programmé en outre pour déterminer que les conditions sont maintenues pour évacuer du SOx déposé sur ledit catalyseur arrière à trois voies (23) lorsque ladite quantité de dépôt de SOx estimée est égale ou supérieure à une première quantité prédéterminée, et pour déterminer que les conditions d'évacuation de SOx ne sont plus maintenues lorsque ladite quantité de dépôt de SOx estimée est tombée à ou en dessous d'une deuxième quantité prédéterminée inférieure à ladite première quantité prédéterminée.

15 14. Dispositif de purification de gaz d'échappement selon la revendication 10, comprenant en outre un capteur de concentration de NOx (36) pour détecter la concentration des NOx des gaz d'échappement s'écoulant dudit catalyseur arrière à trois voies (23), et ledit microprocesseur est programmé en outre pour estimer une quantité de NOx absorbés sur ledit catalyseur arrière à trois voies (23), et pour déterminer que les conditions sont maintenues pour évacuer les SOx déposés sur ledit catalyseur arrière à trois voies (23) sur la base de ladite concentration détectée des NOx et ladite quantité d'absorption estimée des NOx.

20 15. Dispositif de purification de gaz d'échappement selon la revendication 14, où ledit microprocesseur est programmé en outre pour déterminer que les conditions sont maintenues pour évacuer du SOx déposé lorsque la concentration de NOx, détectée au moment où la quantité NOx absorbée sur ledit catalyseur arrière à trois voies (23) est égale ou supérieure à une quantité prédéterminée, est plus grande qu'une valeur prédéterminée autorisée.

25 16. Dispositif de purification de gaz d'échappement selon la revendication 10, comprenant en outre un capteur de détection de conditions de roulement pour détecter des conditions de roulement, où ledit microprocesseur est programmé en outre pour déterminer que les conditions ne sont pas maintenues pour augmenter la température dudit catalyseur arrière à trois voies (23), lorsque les conditions de roulement détectées sont en dehors d'une région de roulement d'évacuation de SOx prédéterminée, indépendamment du fait si oui ou non les conditions sont maintenues pour évacuer les SOx déposés sur ledit catalyseur arrière à trois voies.

30 17. Dispositif de purification de gaz d'échappement selon la revendication 10, comprenant en outre un capteur de mesure de température (35) pour détecter une température dudit catalyseur arrière à trois voies (23), où ledit microprocesseur est programmé en outre pour déterminer que les conditions ne sont pas maintenues pour augmenter la température dudit catalyseur arrière à trois voies (23) lorsque la température dudit catalyseur à trois voies (23) dépasse une température autorisée même si la température dudit catalyseur arrière à trois voies (23) est égale ou supérieure à une température d'évacuation des SOx prédéterminée indépendamment du fait si oui ou non les conditions sont maintenues pour évacuer les SOx déposés sur ledit catalyseur arrière à trois voies (23).

35 18. Dispositif de purification de gaz d'échappement selon la revendication 10, comprenant en outre un capteur de mesure de température pour détecter une température dudit catalyseur arrière à trois voies (23), où ledit microprocesseur est programmé en outre pour régler les rapports air-combustible des gaz d'échappement commandés par lesdits premier et deuxième dispositifs de commande (11) du rapport air-combustible de façon que le rapport air-combustible des gaz d'échappement amenés audit catalyseur arrière à trois voies (23) soit plus riche que le rapport air-combustible stoechiométrique lorsque les conditions sont maintenues pour évacuer les SOx déposés sur ledit catalyseur arrière à trois voies (23), et la température dudit catalyseur arrière à trois voies (23) est égale ou supérieure à une température d'évacuation des SOx.

40 19. Dispositif de purification de gaz d'échappement selon la revendication 18, où ledit microprocesseur est programmé en outre pour régler le degré de la richesse du rapport air-combustible pour qu'il soit plus grand, plus la quantité des SOx déposée sur ledit catalyseur arrière à trois voies (23) est grande.

45 20. Dispositif de purification de gaz d'échappement selon la revendication 18, où ledit microprocesseur est programmé en outre pour régler le degré de la richesse du rapport air-combustible pour qu'il soit plus petit, plus le temps qui s'est écoulé à partir du moment où la commande de changement riche du rapport air-combustible commence, est

long.

21. Dispositif de purification de gaz d'échappement selon au moins l'une des revendications 1 à 20, comprenant en outre un dispositif de commande de l'instant d'allumage pour appliquer une correction de retard à l'instant d'allumage qui est préréglé en accord avec des conditions de roulement, lorsque les conditions sont maintenues pour augmenter la température dudit catalyseur arrière à trois voies (23).

22. Dispositif de purification de gaz d'échappement selon au moins l'une des revendications 1 à 21, comprenant en outre un dispositif de commande de l'instant d'ouverture de la soupape d'échappement pour appliquer une correction d'avance à un instant d'ouverture d'une vanne d'échappement qui est préréglé en accord avec des conditions de roulement lorsque les conditions sont maintenues pour augmenter la température dudit catalyseur arrière à trois voies (23).

23. Dispositif de purification de gaz d'échappement selon au moins l'une des revendications 1 à 22, comprenant en outre un dispositif de commande de réaspiration des gaz d'échappement pour appliquer une correction de réduction à une quantité de réaspiration des gaz d'échappement qui est préréglée en accord avec des conditions de roulement lorsque les conditions sont maintenues pour augmenter la température dudit catalyseur arrière à trois voies (23).

24. Dispositif de purification de gaz d'échappement pour un moteur à combustion interne, comprenant :

un premier catalyseur avant à trois voies (21) installé dans un premier passage d'échappement (5a) relié à un premier groupe de cylindres, un deuxième catalyseur avant à trois voies (22) installé dans un deuxième passage d'échappement (5b) relié à un deuxième groupe de cylindres, un catalyseur arrière à trois voies (23) installé dans un passage de gaz d'échappement (5c) qui combine les gaz d'échappement des premier et deuxième passages d'échappement (5a, 5b),

un premier dispositif de commande (11) du rapport air-combustible pour commander le rapport air-combustible des gaz d'échappement amenés au premier catalyseur avant à trois voies (21) à un rapport air-combustible prédéterminé,

un deuxième dispositif de commande (11) du rapport air-combustible pour commander le rapport air-combustible des gaz d'échappement amenés au deuxième catalyseur avant à trois voies (22) à un rapport air-combustible prédéterminé, et

un microprocesseur programmé pour :

déterminer les conditions sous lesquelles les SOx déposés sur le catalyseur arrière à trois voies (23) devraient être évacués,

régler le rapport air-combustible des gaz d'échappement commandé par l'un des dispositifs de commande (11) du rapport air-combustible à un rapport air-combustible plus riche que le rapport air-combustible stoechiométrique, et établir le rapport air-combustible des gaz d'échappement commandé par l'autre des dispositifs de commande (11) du rapport air-combustible à un rapport air-combustible plus pauvre que le rapport air-combustible stoechiométrique lorsque les SOx déposés sur le catalyseur arrière à trois voies (23) devrait être évacués, où le rapport air-combustible des gaz d'échappement qui s'écoulent dans le catalyseur arrière à trois voies (23), est commandé pour être un rapport air-combustible plus riche que le rapport air-combustible stoechiométrique, lorsque les SOx déposés sur le catalyseur arrière à trois voies (23) devraient être libérés, en commandant ainsi par réinjection le rapport air-combustible des gaz d'échappement amenés au catalyseur arrière à trois voies (23) sur la base d'une sortie d'un capteur du rapport air-combustible.

FIG. 1

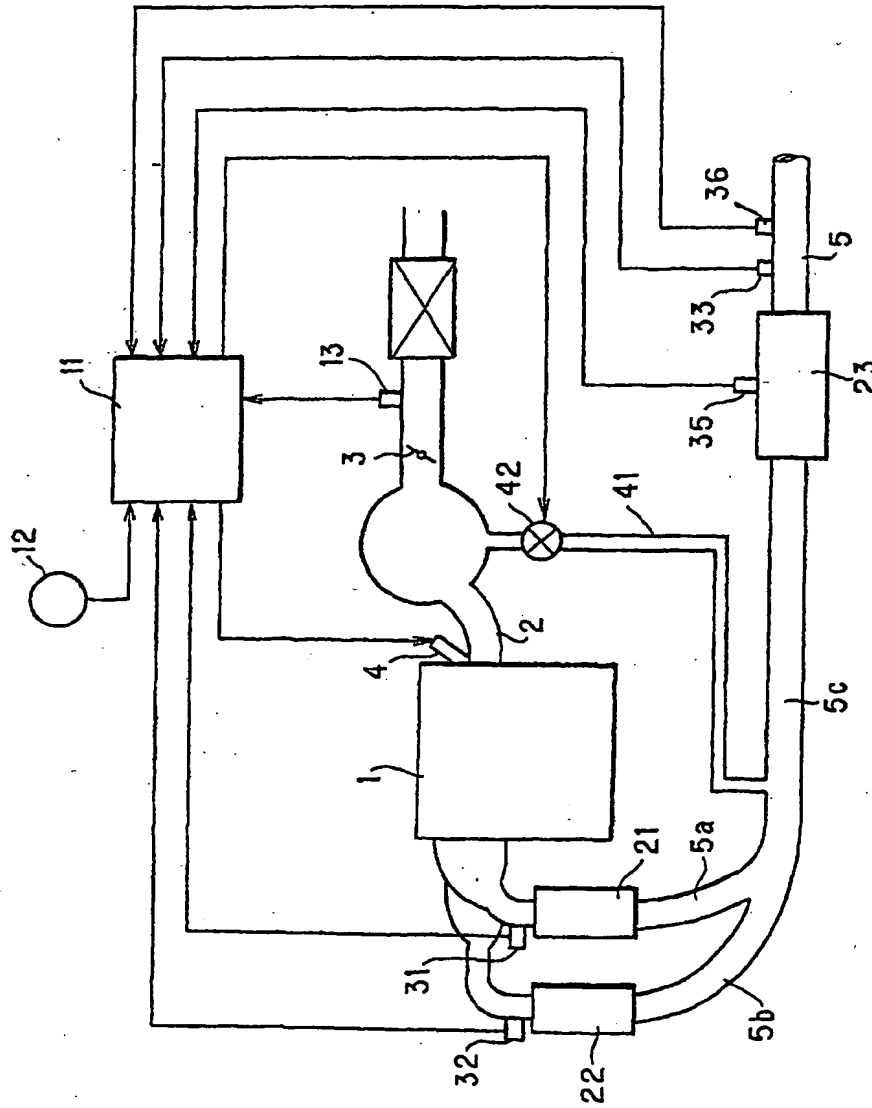


FIG. 2

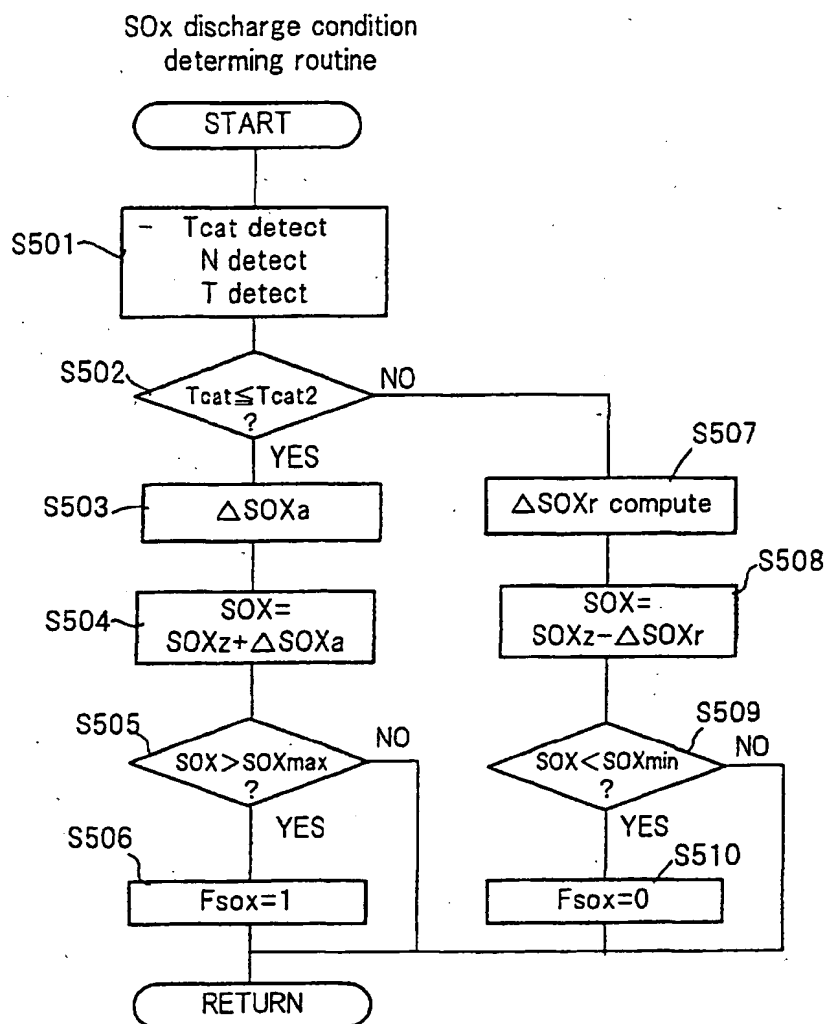


FIG. 3

Temperature increase condition  
determining routine (1)

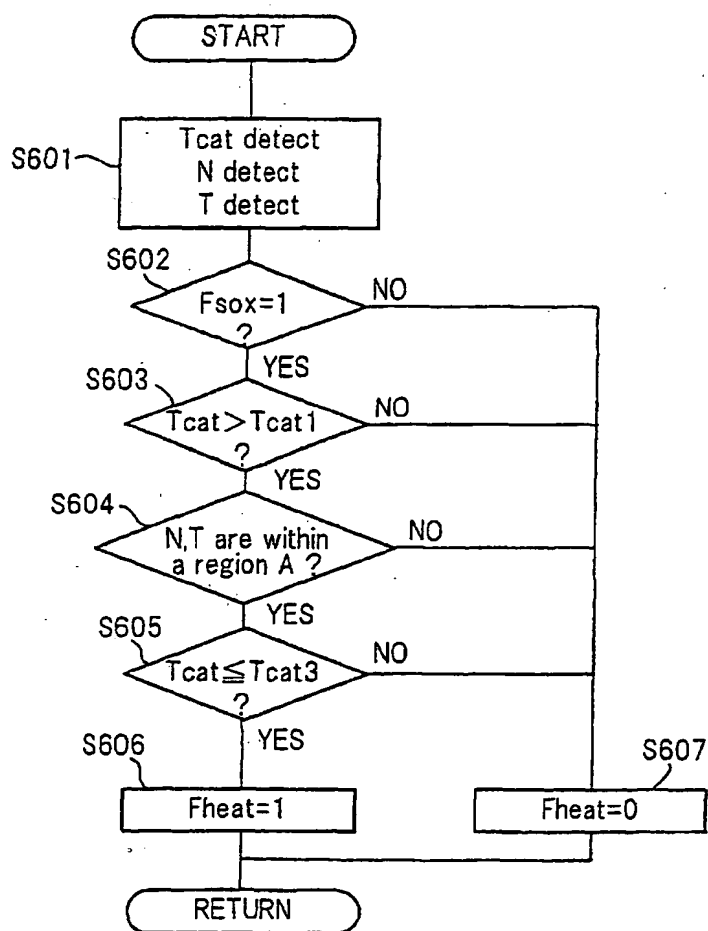




FIG. 4

Enriching condition determining routine (1)


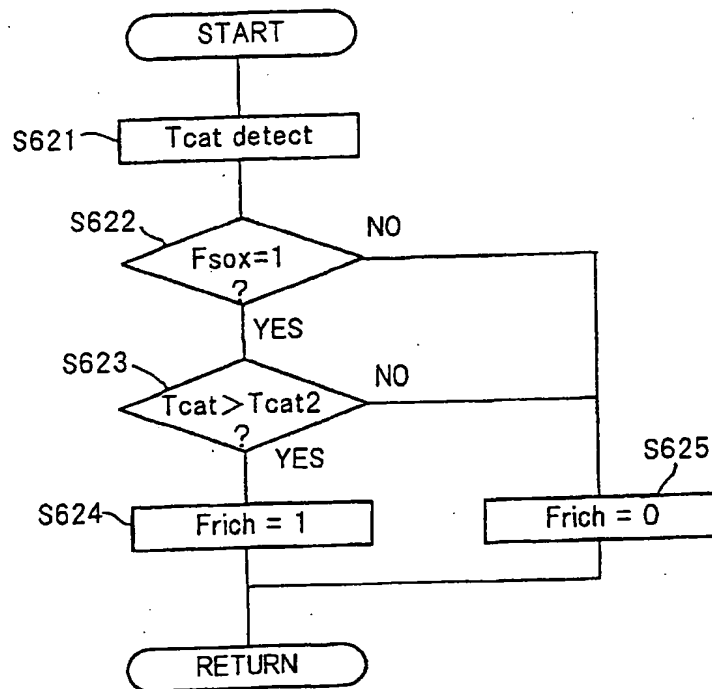


FIG. 5

Mode setting routine (1)

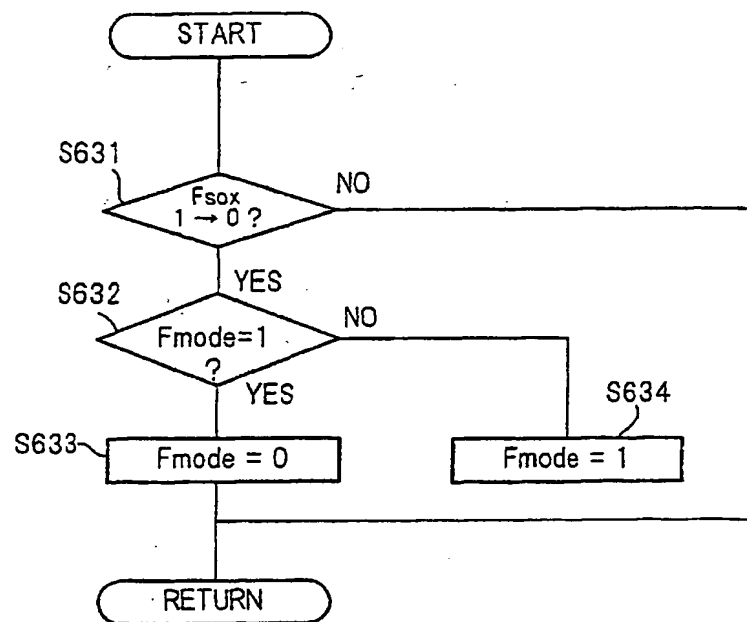

Air-fuel ratio control value setting routine (1)

FIG. 6

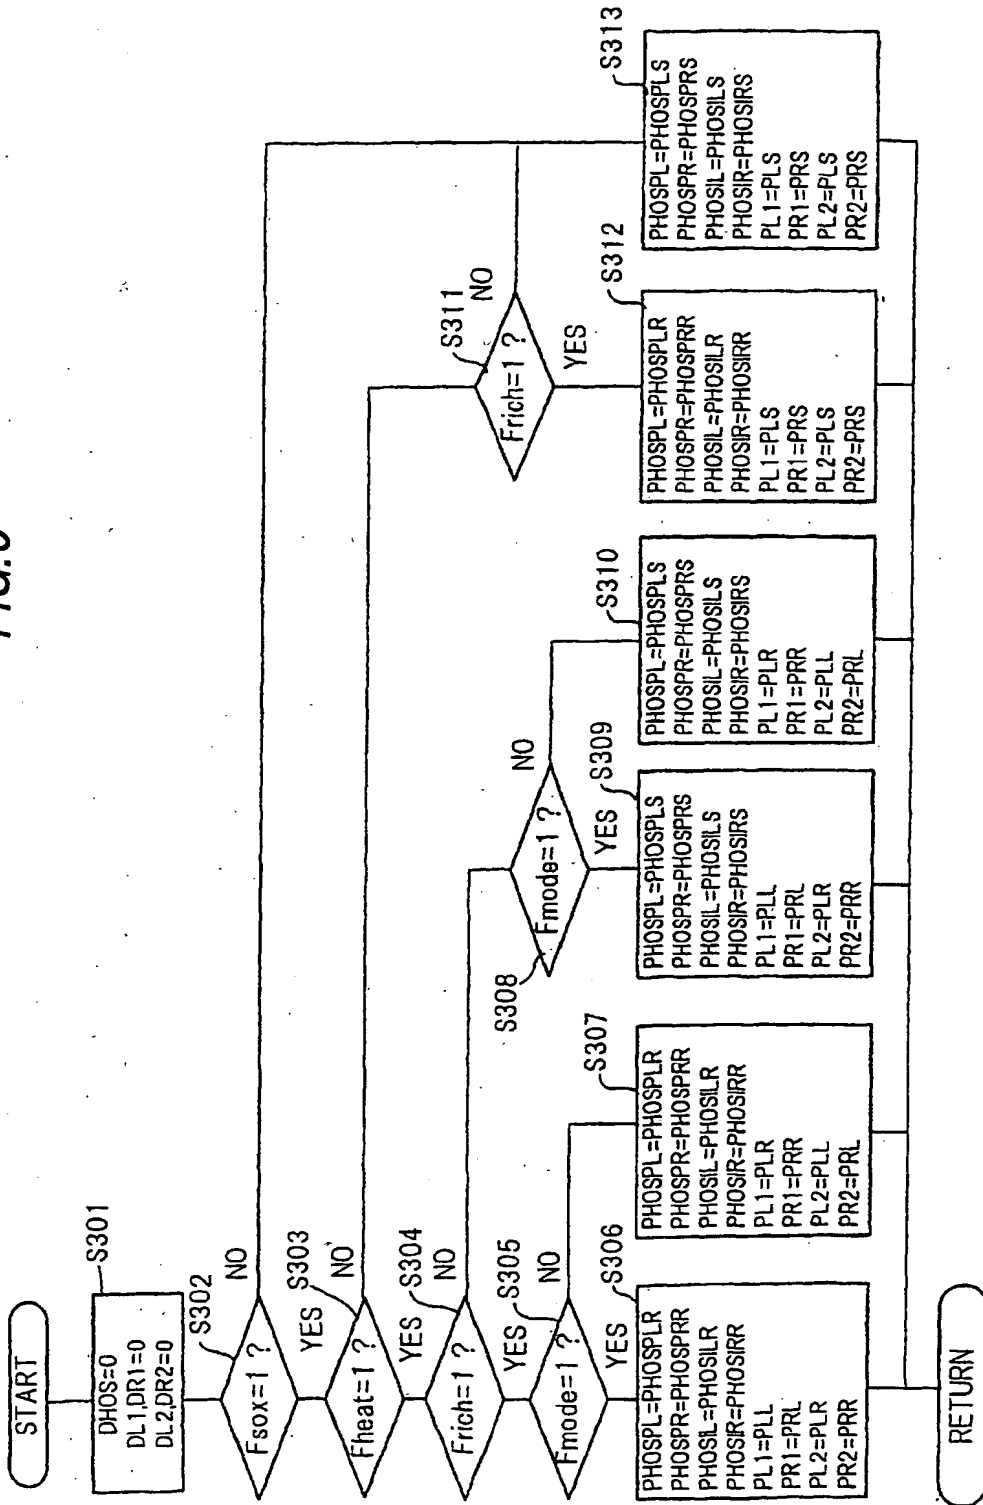


FIG. 7

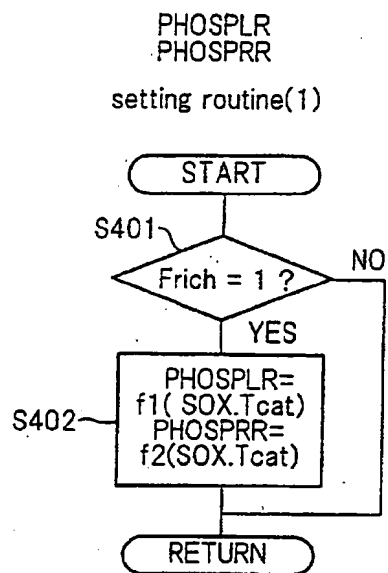


FIG. 8

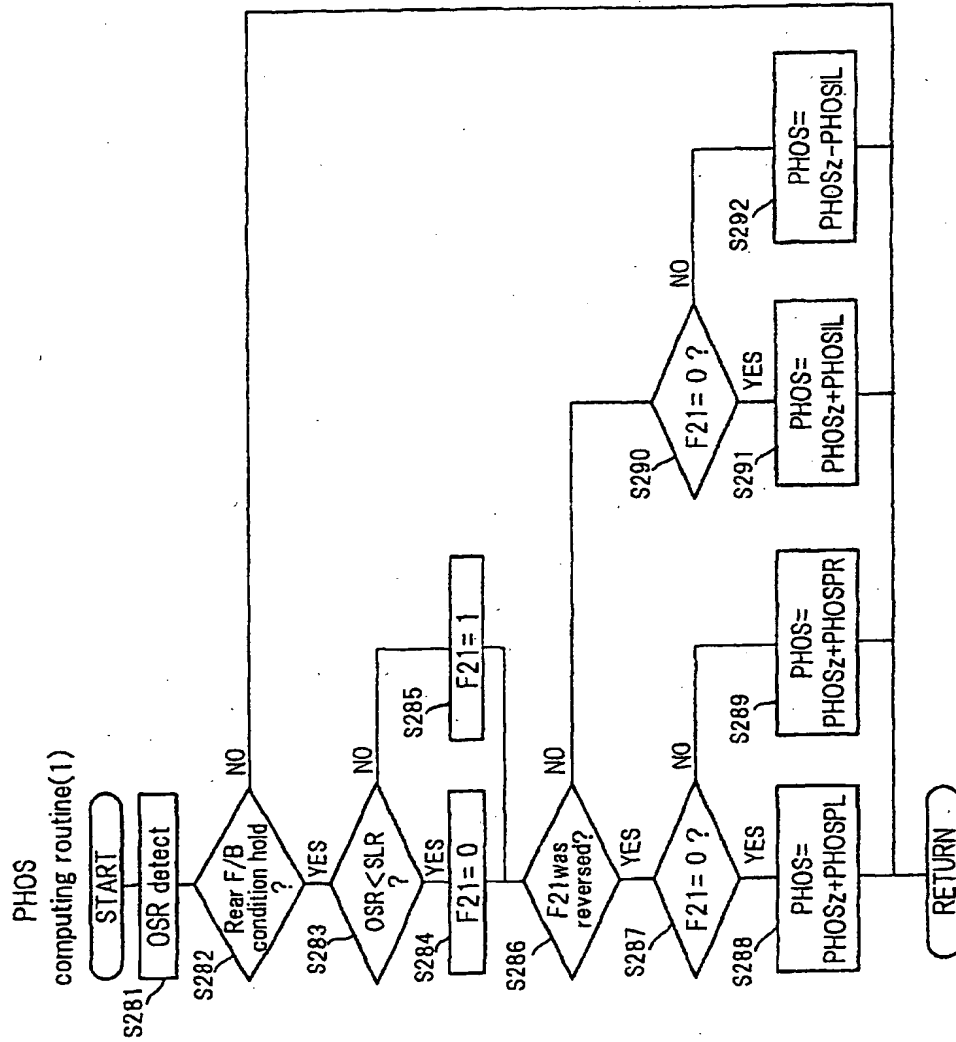


FIG. 9

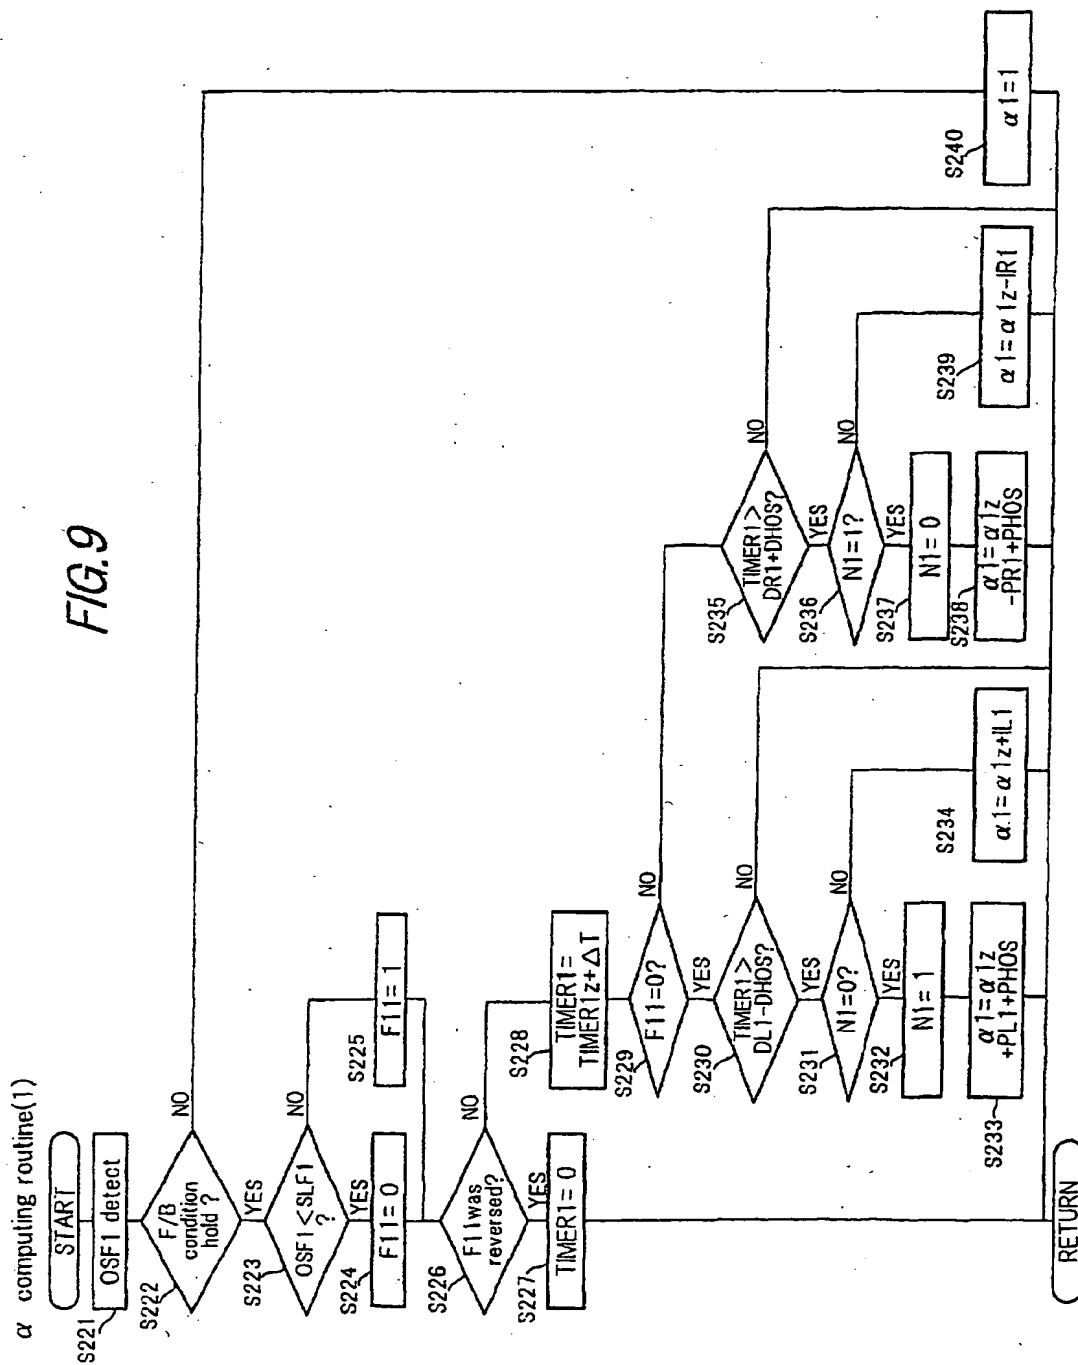


FIG. 10


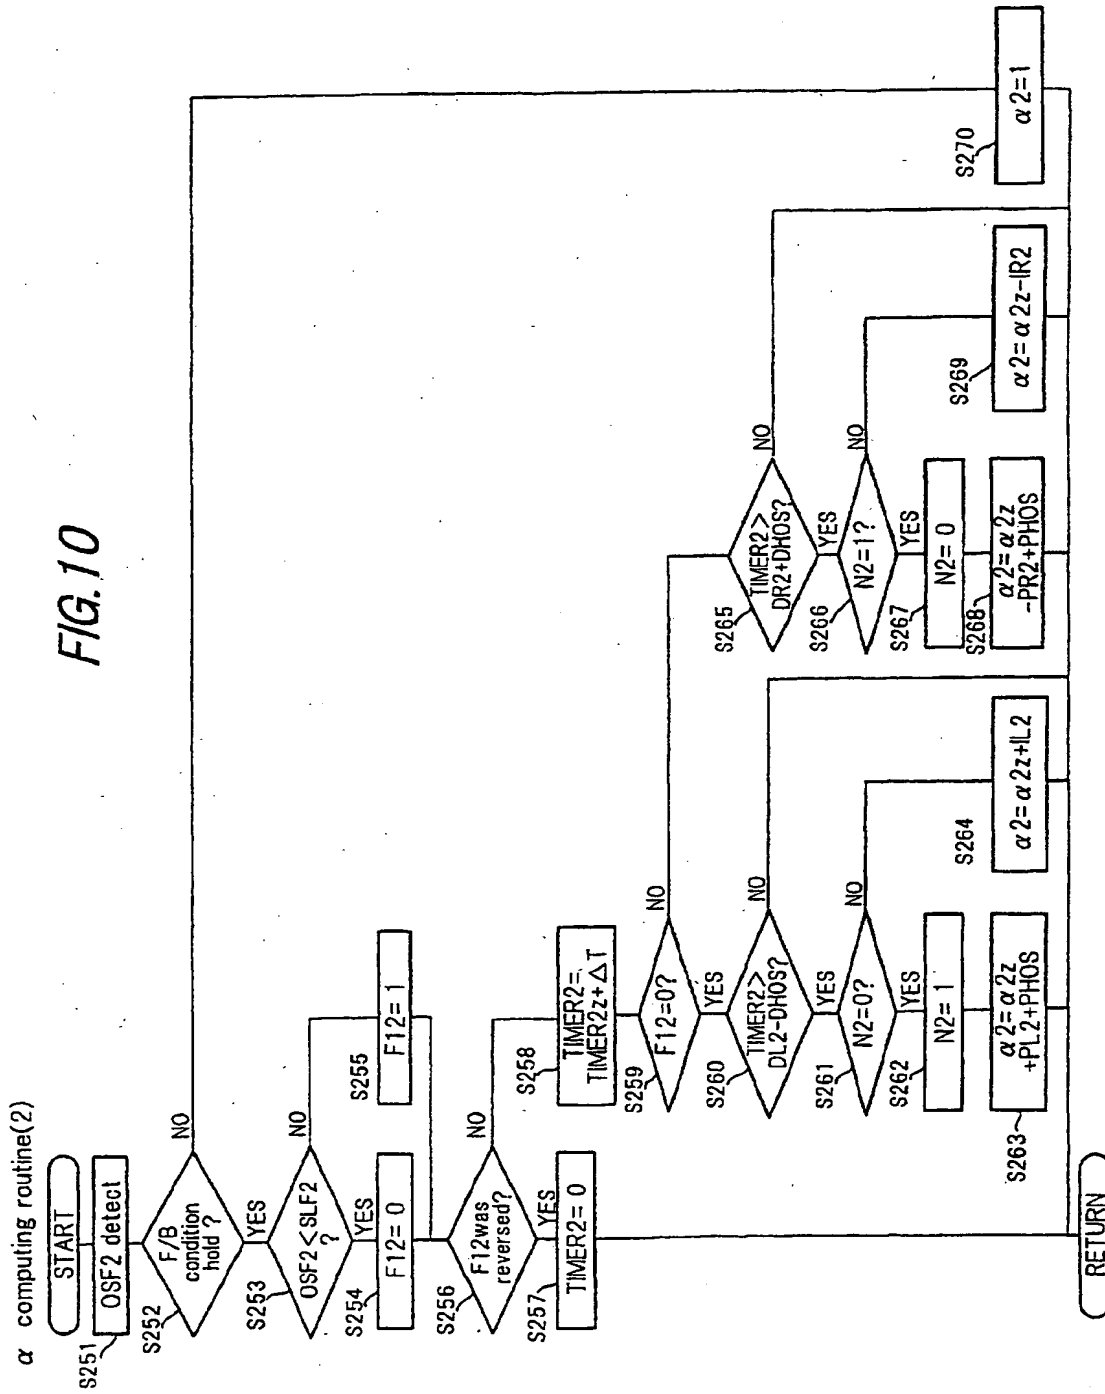



FIG. 11

Target air-fuel ratio  
setting routine(1)



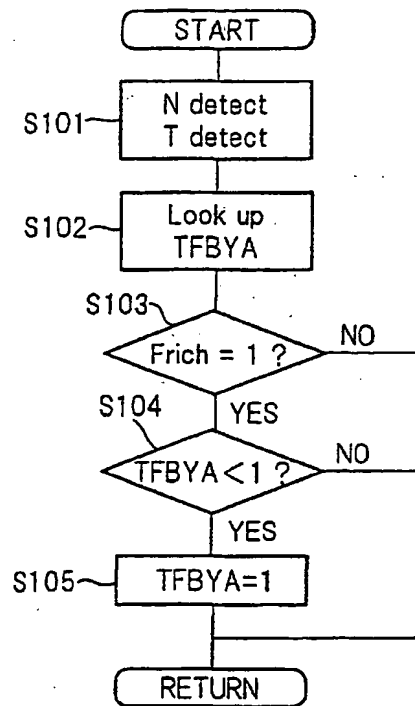


*FIG. 12*

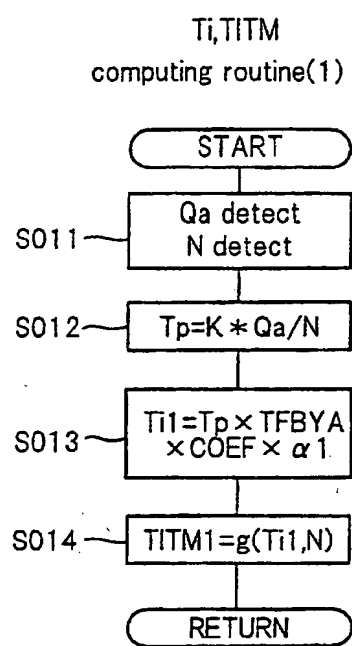


*FIG. 13*


Ti, TITM  
computing routine(2)

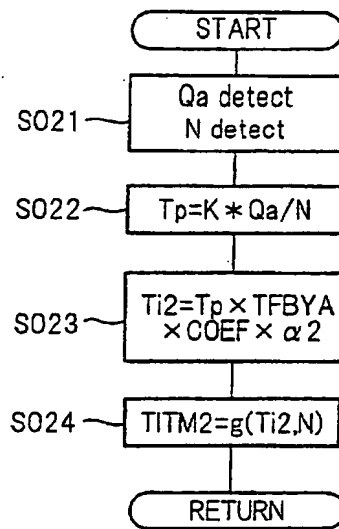


*FIG. 14*

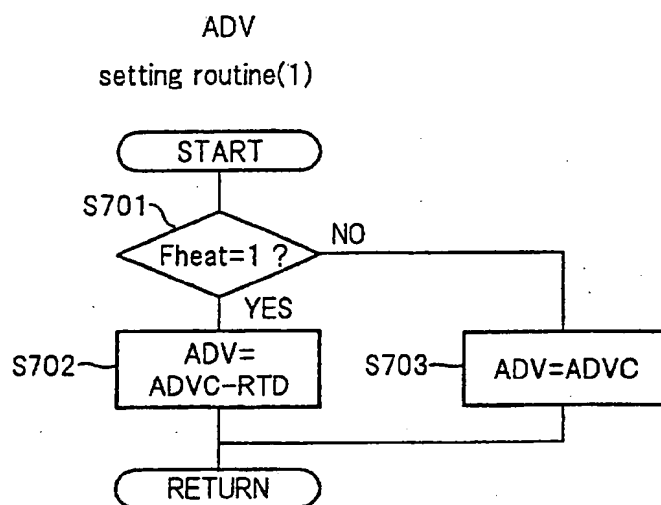

*FIG. 15*

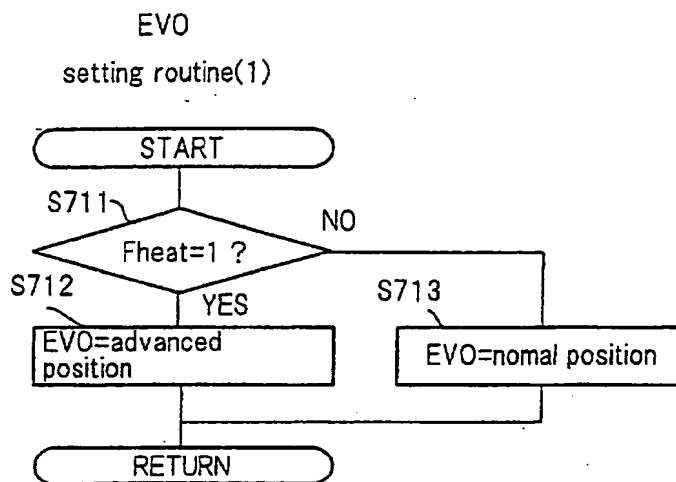

*FIG. 16*

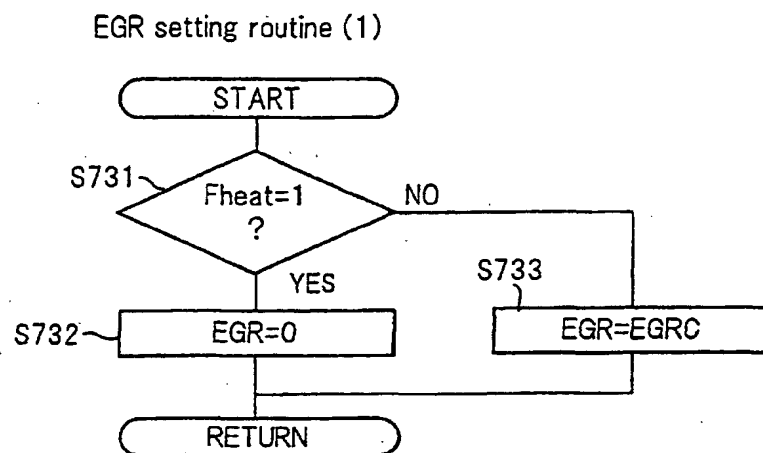

*FIG. 17*

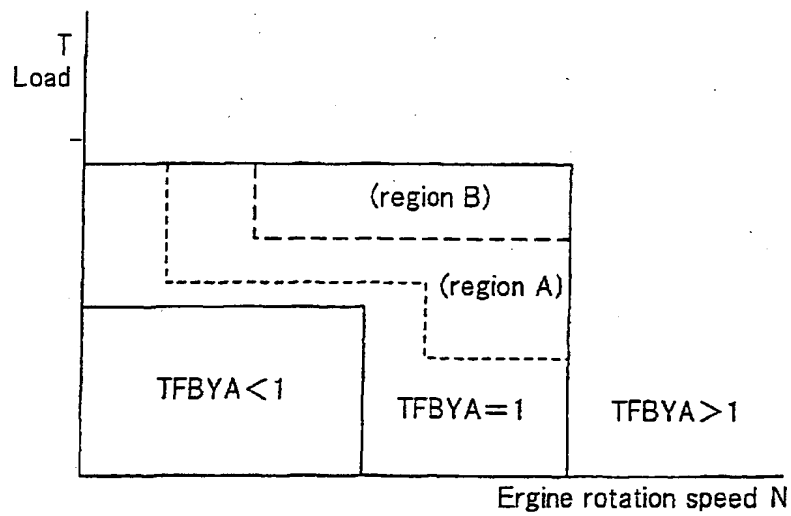


FIG. 18

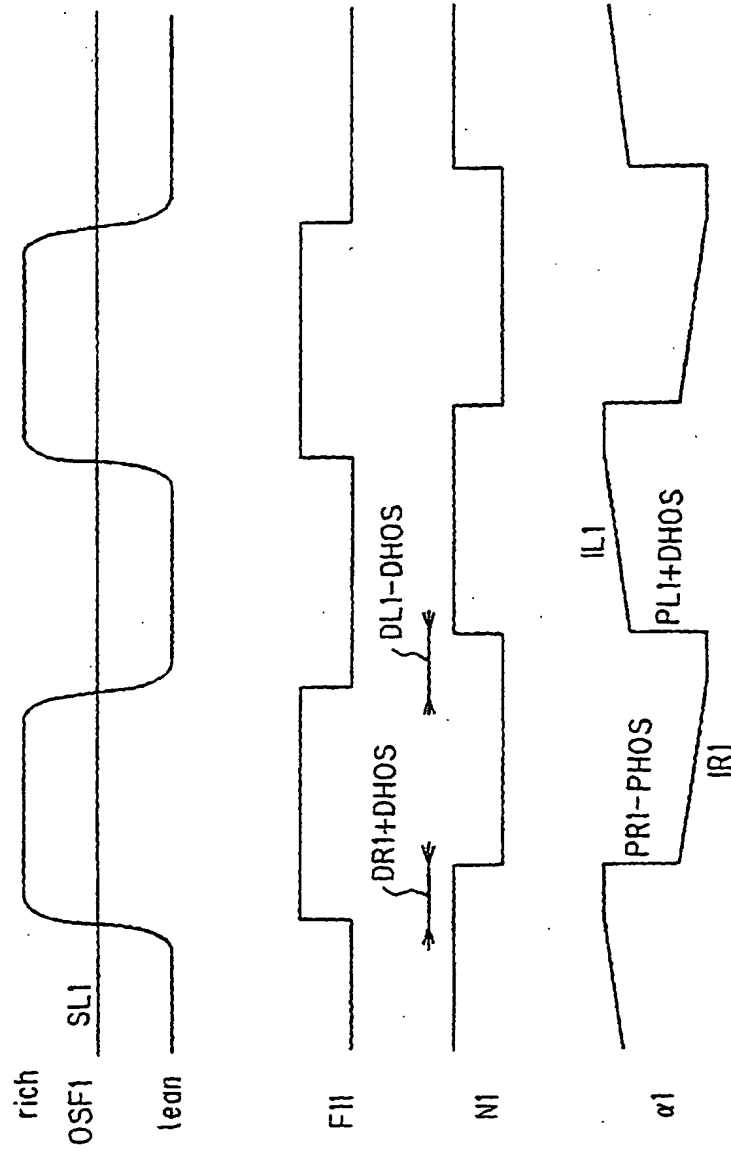


FIG. 19

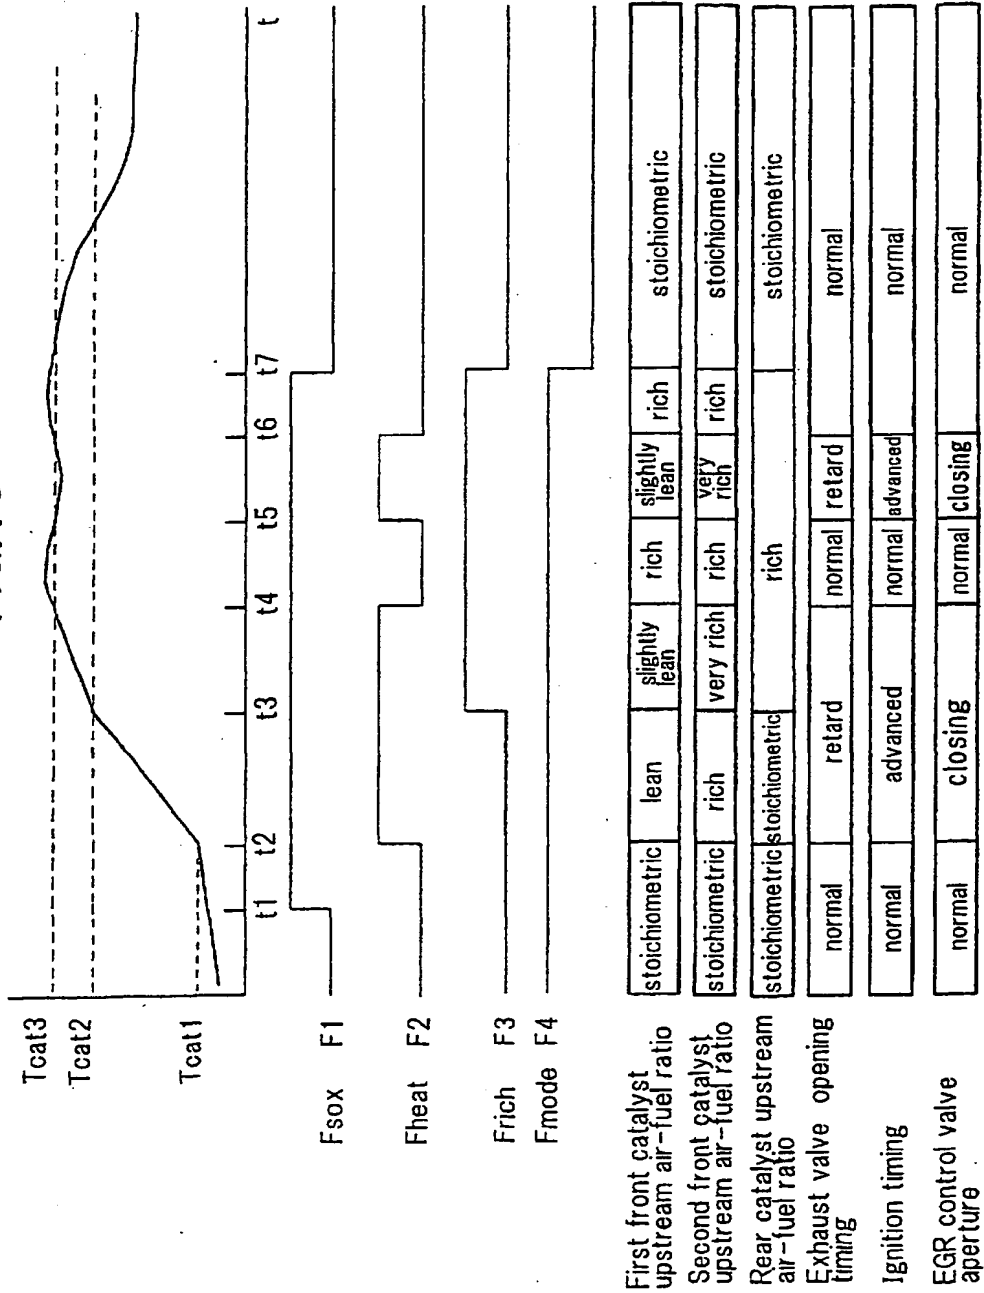




FIG. 20

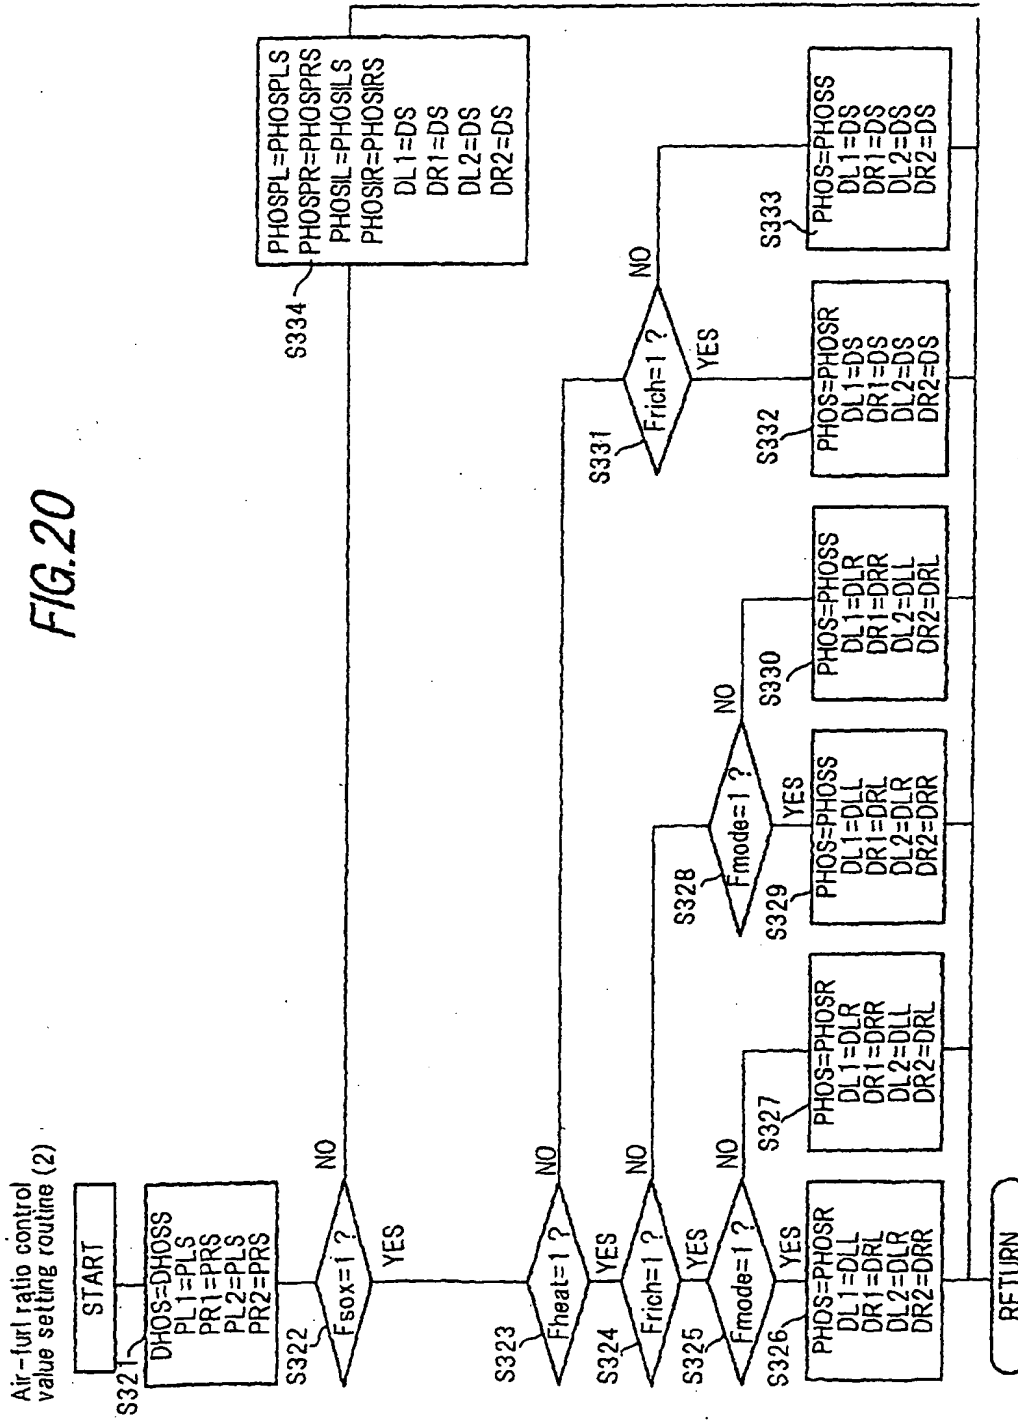


FIG. 21

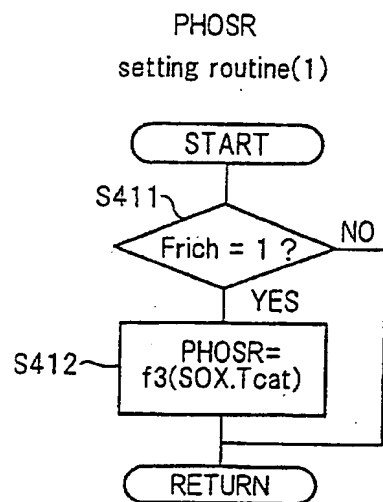


FIG. 22


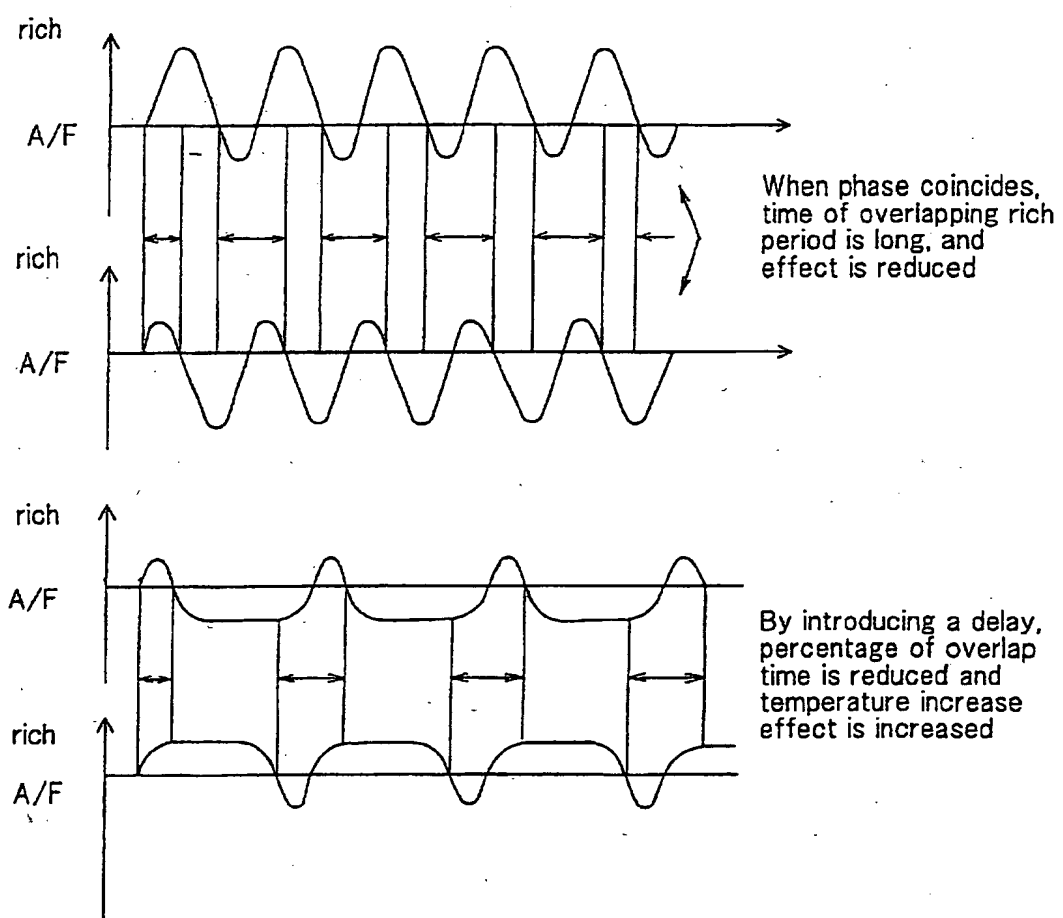


FIG. 23

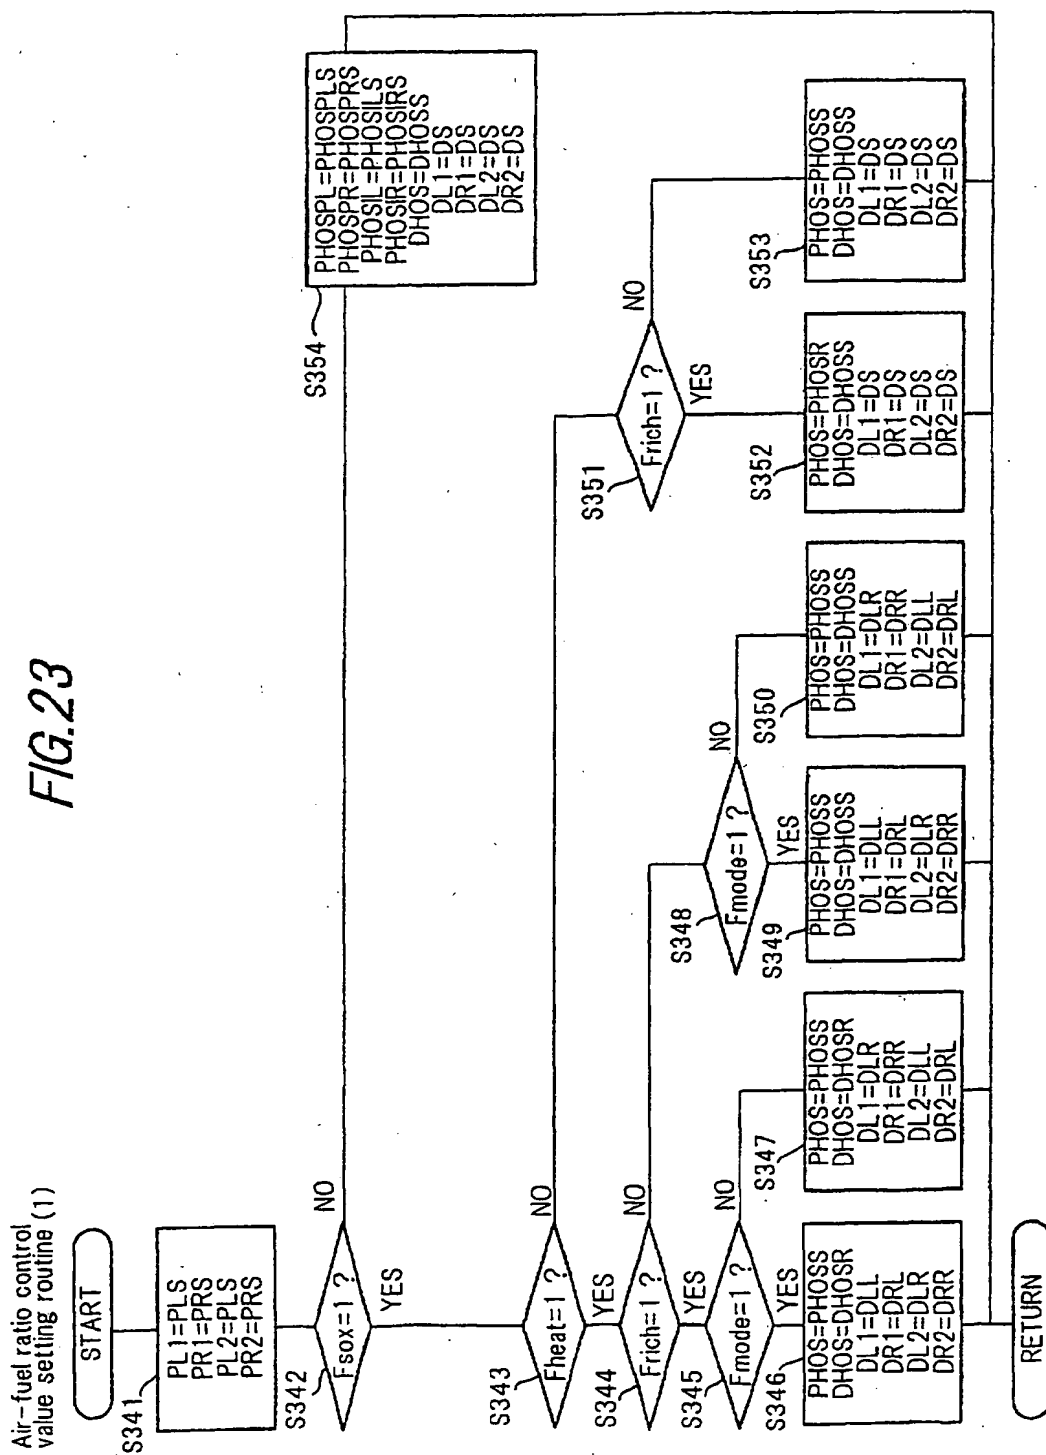

*FIG. 24*

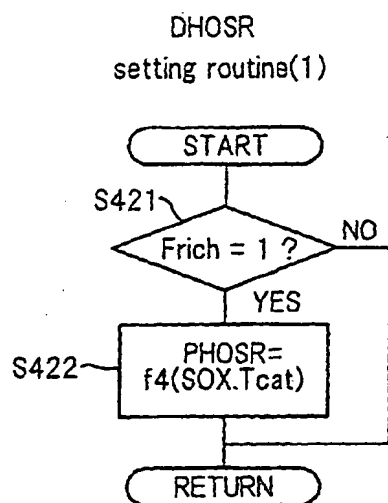


FIG. 25

Mode setting routine(2)

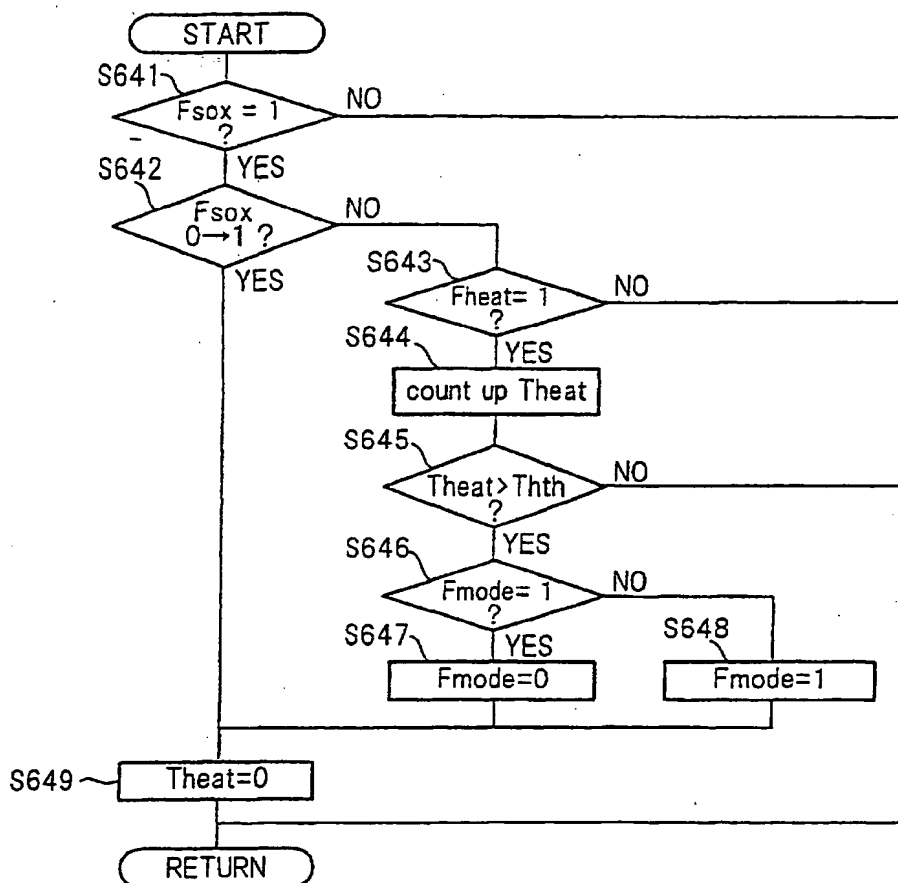


FIG. 26


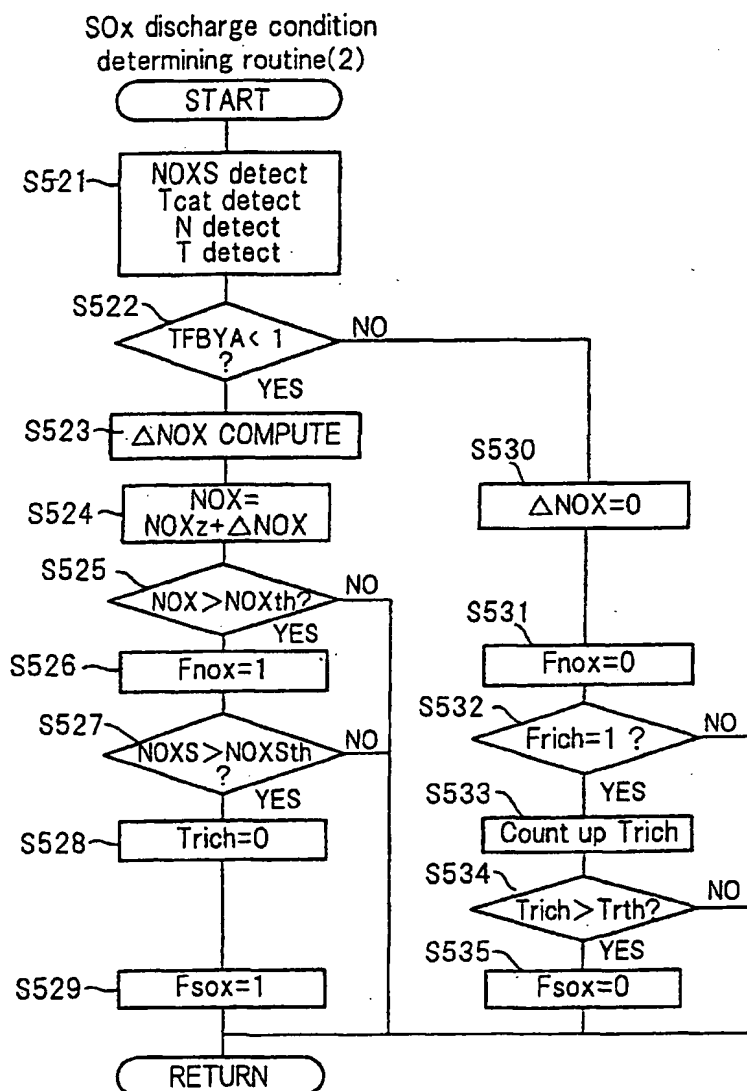


FIG. 27



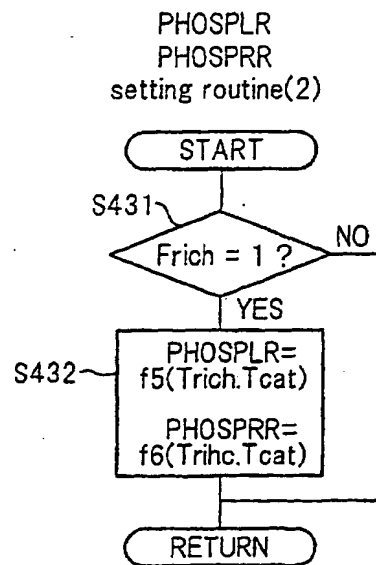

*FIG.28*

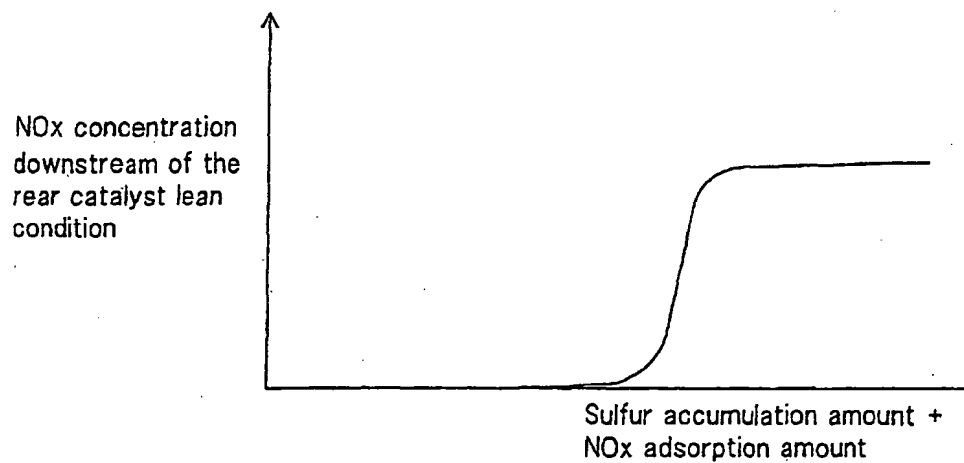


FIG. 29

SOx discharge condition  
determining routine